
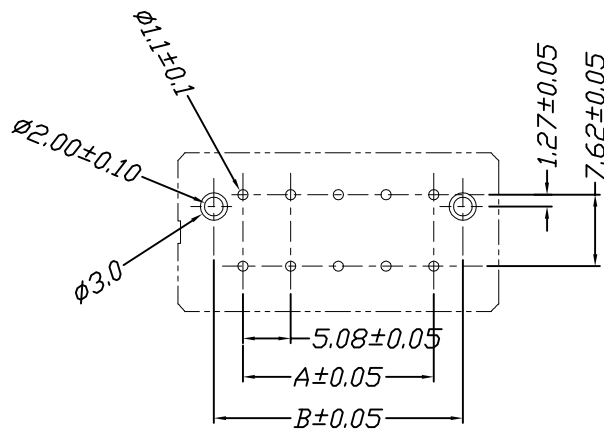
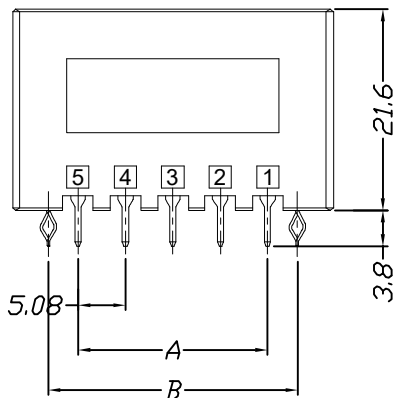



环保物料

Specifications:

Voltage Rating : 250V AC/DC  
 Current Rating : 8A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 15mΩ(MAX.)  
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

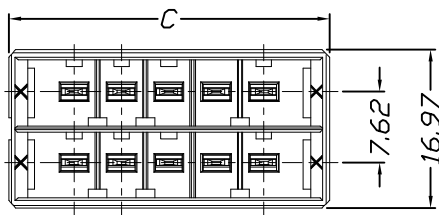

P.C.B. LAYOUT

Part No.	Dimensions		
	A	B	C
2*3P	10.16	16.51	24.16
2*5P	20.32	26.67	34.32
2*6P	25.40	31.75	39.40

Material	Color	PIN Material	Stator Material
NYLON&PBT,UL94V-0	Black	Brass/Tin-plated	Brass/Tin-plated

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2018. 7. 28	MM	0.00±0.25	X° ±3°	APPROVED		
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28



PART NO:	45082W00-NP*-A1-**-**	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1

TITLE: 5.08mm pitch Dual Wafer