
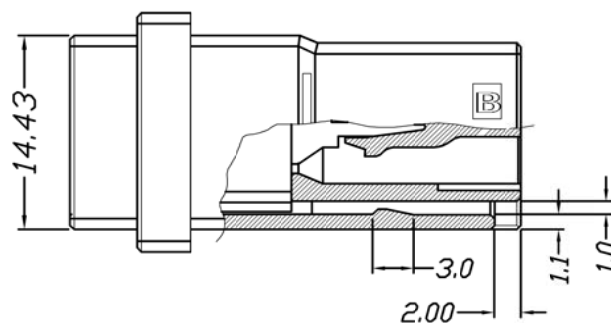
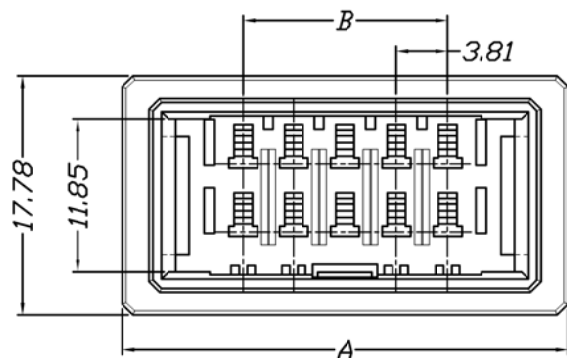


环保物料

Specifications:

Voltage Rating : 250V AC/DC  
 Current Rating : 8A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 15mΩ(MAX.)  
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

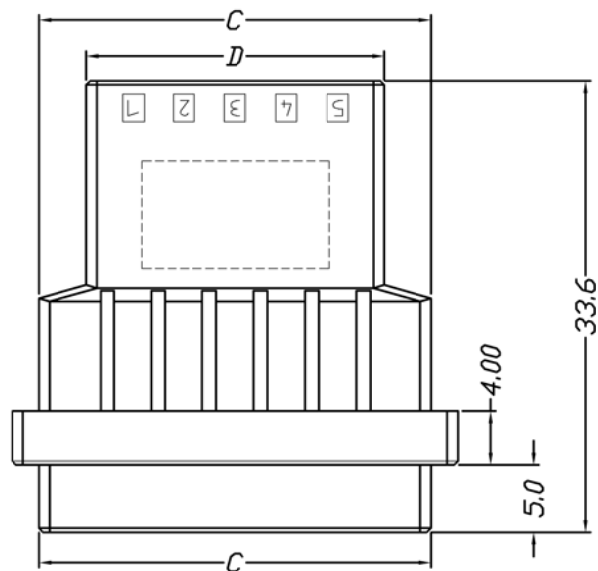

Circuits Part No	Dimensions			
	A	B	C	D
2*10P	52.24	34.29	48.29	41.29
2*8P	44.62	26.67	40.67	33.67
2*6P	37.00	19.05	33.05	26.05
2*5P	33.19	15.24	29.24	22.24
2*4P	29.38	11.43	25.43	18.43
2*3P	25.57	7.62	21.62	14.62
Material		Color		
PBT,UL94V-0		Black		

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<p>康导新能源                  网址: www.dgoonne.com 电话: 0769-85337633                  邮箱: 2850175988@qq.com 传真: 0769-85392827</p>	PART NO: 33811H60-2*NPA-3-PT
		LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	0.0±0.35	X° REF±6°	DESIGNER				ENDE05
REV.	REVISION RECORD	0.00±0.25	X° ±3°	DRAWN	肖坤权	2018.7.28		TITLE: 3.81mm pitch Dual Housing
		0.000±0.15	X° X'±2°				REV: A0	SHEET: 1/1