
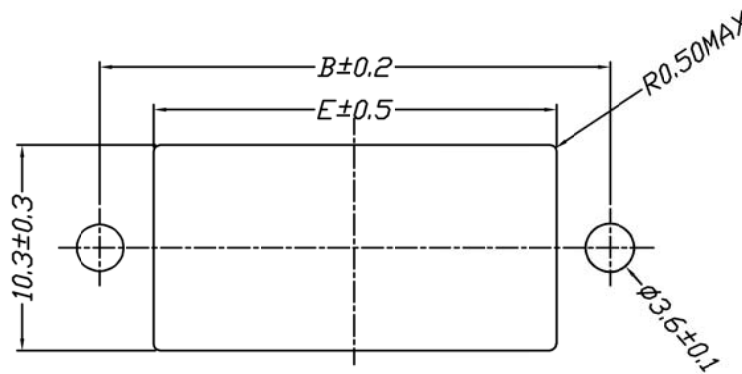




环保物料

Specifications:

Voltage Rating : 250V AC/DC  
 Current Rating : 8A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 15mΩ(MAX.)  
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

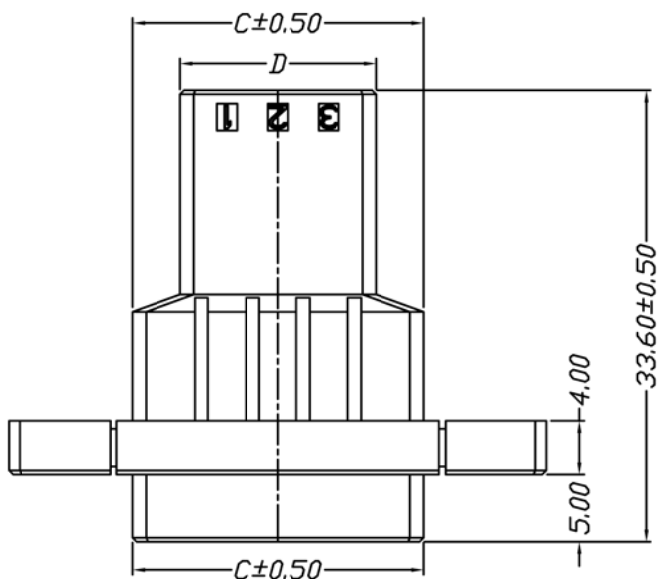

RECOMMENDED PANEL LAYOUT

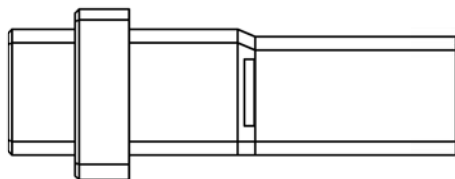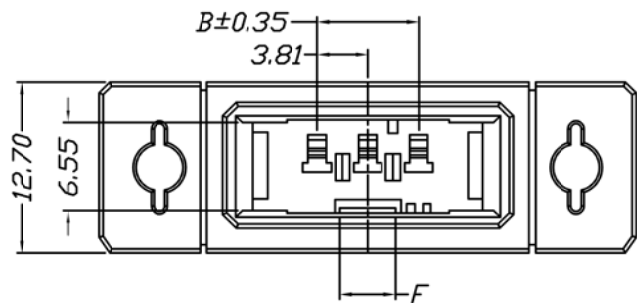

Circuits Part No	Dimensions					
	A	B	C	D	E	F
10P	67.0	58.0	48.29	41.29	49.2	4.0
8P	59.0	50.0	40.67	33.67	41.6	4.0
5P	47.0	38.0	29.24	22.24	30.2	4.0
3P	40.0	31.0	21.62	14.62	22.6	2.0
Material			Color			
PBT,UL94V-0			Black			

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 33811H00-NPA-3-PT
LINEAR	ANGLES	1:1	APPROVED			
0.0±0.35	X° REF±6°		DESIGNER			
0.00±0.25	X° ±3°		DRAWN	肖坤权		
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	TITLE: 3.81mm pitch Dual Housing	REV: A0 SHEET: 1/1