

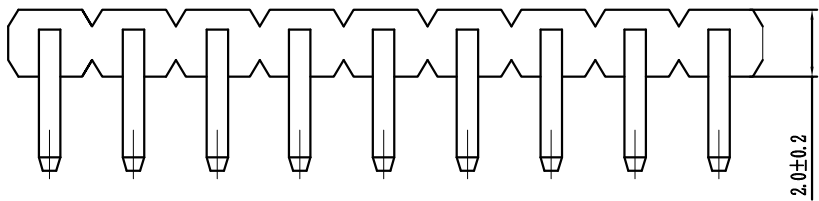


环保物料


Pin数	尺寸A	尺寸B
1x1	-	2.50
1x2	2.50	5.00
1x3	5.00	7.50
1x4	7.50	10.00
1x5	10.00	12.50
1x6	12.50	15.00
1x7	15.00	17.50
1x8	17.50	20.00
1x9	20.00	22.50
1x10	22.50	25.00
1x11	25.00	27.50
1x12	27.50	30.00
1x13	30.00	32.50
1x14	32.50	35.00
1x15	35.00	37.50
1x16	37.50	40.00
1x17	40.00	42.50
1x18	42.50	45.00
1x19	45.00	47.50
1x20	47.50	50.00
1x21	50.00	52.50
1x22	52.50	55.00
1x23	55.00	57.50
1x24	57.50	60.00
1x25	60.00	62.50
1x26	62.50	65.00
1x27	65.00	67.50
1x28	67.50	70.00
1x29	70.00	72.50
1x30	72.50	75.00
1x31	75.00	77.50
1x32	77.50	80.00
1x33	80.00	82.50
1x34	82.50	85.00
1x35	85.00	87.50
1x36	87.50	90.00
1x37	90.00	92.50
1x38	92.50	95.00
1x39	95.00	97.50
1x40	97.50	100.00

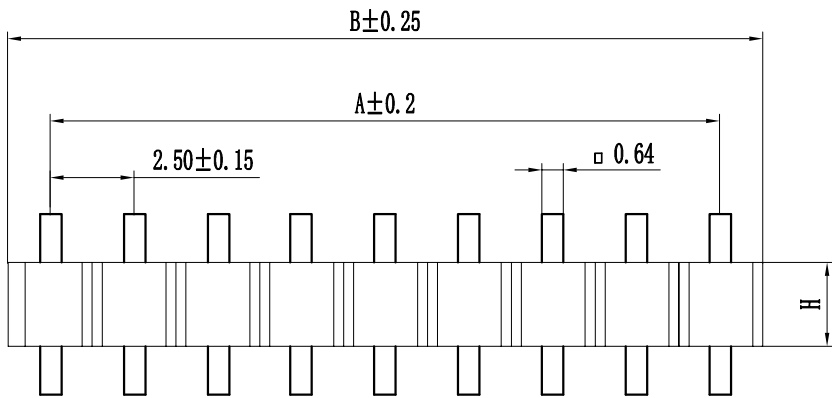

Specification:
 Current Rating : 3.0AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Height
H=1.5mm, 3.0mm, 3.3mm

PCB LAYOUT

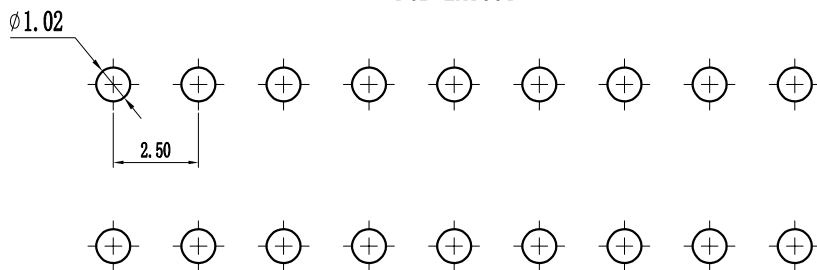

P 2X 9D-XXX X X-XX-X-XXX				
①	②	③	④	⑤
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	
P=Pin Header	08-0.80	9D=Right Angle DIP Type	Single Row	Double Row
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin	201=2*1Pin
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin	202=2*2Pin
E=Injector Header	20=2.00	0S=Horizontal SMT Type	! ! !	! ! !
	2X=2.50		140=1*40pin	240=2*40pin
	39=3.96			
	50=5.08			
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code	
A-PBT	0#-Sn-Au 1#-Ni 2#-Sn 3#-Matte-Tin 5#-Au	0:No Request		
B-PA46	0A-Sn-Au 1u" 0F-Sr-Au 10u" 5A-Au 1u"	1:RoHS		
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)		
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"			
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" !			
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"			

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

TITLE:
 Pitch2.50mm Pin Header, Single Plastic,
 Single Row, Right Angle Type

PART. NO:	KDPH-0076
DWG. NO:	ENDE0076
REV:	AO
SHEET:	1/1