


环保物料






Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 7A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

43501W00-NP*-B3-**

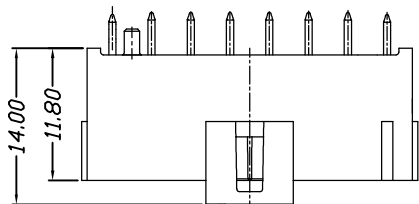

43501W01-NP*-B3-**

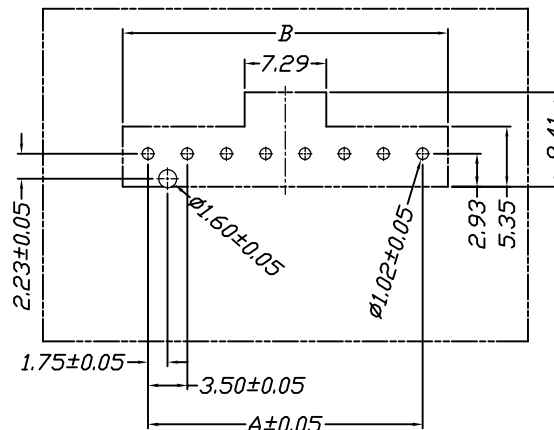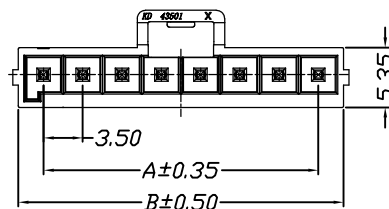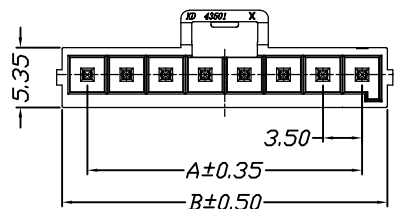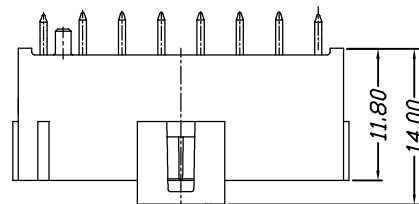

P.C.B. LAYOUT

Part No	Dimensions	
	A	B
2P	3.50	8.00
3P	7.00	11.50
4P	10.50	15.00
5P	14.00	18.50
6P	17.50	22.00
7P	21.00	25.50
8P	24.50	29.00

Material	Color	PIN Material
LCP,UL94V-0	Black	Brass

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2018. 7. 28	MM	0.00±0.25	X° ±3°	APPROVED		
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28

康导新能源
 网址: www.dgonne.com 电话: 0769-85337633
 邮箱: 2850175986@qq.com 传真: 0769-85392827

PART NO:
43501W0*-NP*-B3-**

DWG. NO:
 ENDE05

REV: AO SHEET: 1/1

TITLE:
3.50mm pitch Single Wafer