
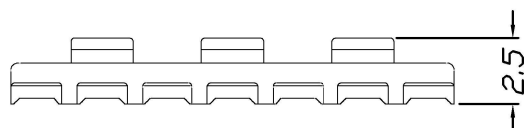


环保物料

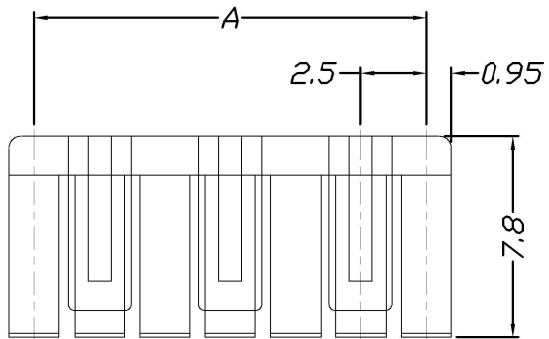

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/500MΩ(MIN.)
 Temperature Range : -25°C~+85°C

Part No.	A
2P	2.50
3P	5.00
4P	7.50
5P	10.00
6P	12.50
7P	15.00
8P	17.50
9P	20.00
10P	22.50

Material	Color
PA66,UL94V-0	Black

GENERAL TOLERANCES		SCALE:	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392627	PART. NO:	
LINEAR	ANGLES	1:1	APPROVED			42504B00-NP*-66	
0.0±0.35	X° REF±6°		DESIGNER			DWG. NO:	
0.00±0.25	X° ±3°		DRAWN	肖坤权 2018.7.28		ENDE05	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	TITLE:	
A0	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	2.50mm pitch Retainer	
						REV: A0	SHEET: 1/1
1	2	3	4	5	6	7	8

PART. NO:		42504B00-NP*-66	
DWG. NO:		ENDE05	
REV: A0	SHEET: 1/1		