


环保物料

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 4.6A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

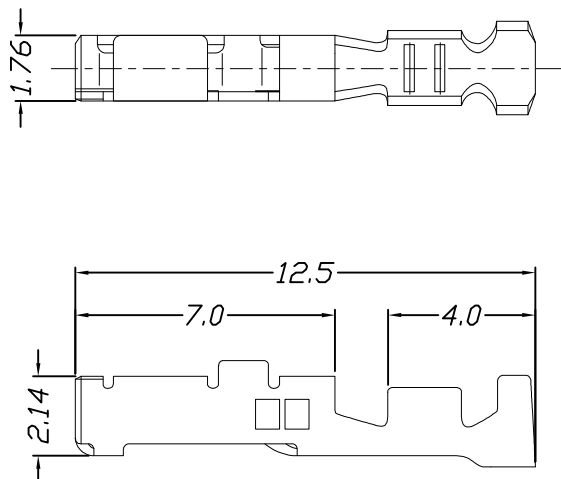

Part No	Wire Range	Insulation O. D.	Material	Finish
42503T0P-**-#24	AWG#28	0.88mm-1.43mm (1.43mm max)	Phosphor Bronze	Au or Sn
42503T1P-**-#20	AWG#24	1.11mm-1.53mm (1.53mm max)	Phosphor Bronze	Au or Sn
42503T2P-**-	-	1.30mm-1.90mm (1.90mm max)	Phosphor Bronze	Au or Sn

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 42503T*P-**-	
				LINEAR	ANGLES					APPROVED	DWG. NO: ENDE05
AO	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER			TITLE: 2.50mm pitch Crimp Terminal		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28	REV:	AO	SHEET: 1/1