


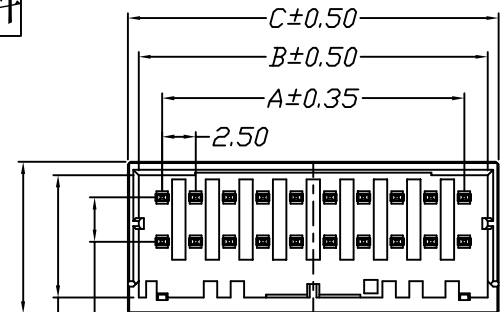
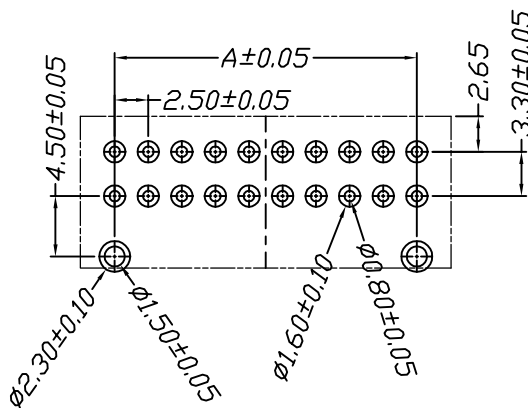
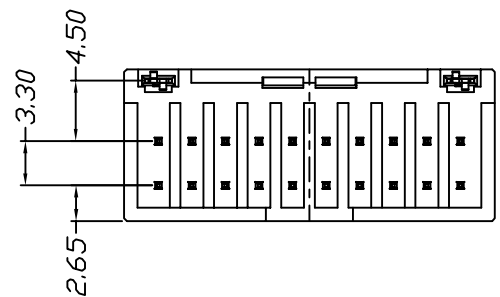


环保物料



Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 5A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

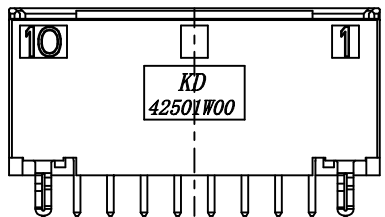

P.C.B. LAYOUT

Part No	Dimensions		
	A	B	C
2*2P	2.50	6.00	7.60
2*3P	5.00	8.50	10.10
2*4P	7.50	11.00	12.60
2*5P	10.00	13.50	15.10
2*6P	12.50	16.00	17.60
2*8P	17.50	21.00	22.60
2*10P	22.50	26.00	27.60

Material	Color	PIN Material	Stator Material
PBT,UL94V-0	Black	Brass/Gold 3U"	Brass/Tin-plated

AO	新图面发行	2018. 7. 28	UNIT: MM
REV.	REVISION RECORD	DATE	SIZE: A4

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1		
0.00±0.35	X° REF±6°	APPROVED		
0.00±0.25	X° ±3°	DESIGNER		
0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018. 7. 28



PART. NO:	42501W00-2*NPA-A1-**	
DWG. NO:	ENDE05	
REV:	AO	SHEET: 1/1

TITLE:
2.50mm pitch Dual Wafer