

环保物料

Specifications:

Voltage Rating : 125V AC/DC




Current Rating : Refer to table

Withstand Voltage : 800V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

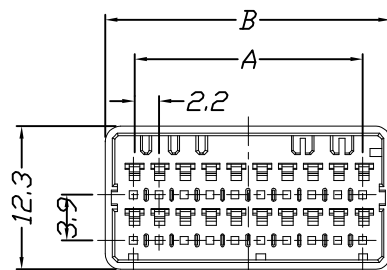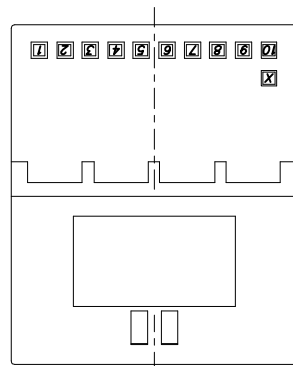

Unit: mm

Part No.	Dimensions	
	A	B
2*3P	4.40	8.00
2*4P	6.60	10.20
2*6P	11.00	14.60
2*10P	19.80	23.40

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
			SIZE: A4			DRAWN	旷淇	2017.06.16

康导新能源 网址: www.dgconne.com 电话: 0769-853377633 邮箱: 2850175988@qq.com 传真: 0769-853922827	PART. NO:	32204H00-2XNP*-PT	
	DWG. NO:	ENDE05	
	TITLE:	2.20mm pitch Dual Housing	
	REV: A0	SHEET:	1/1