
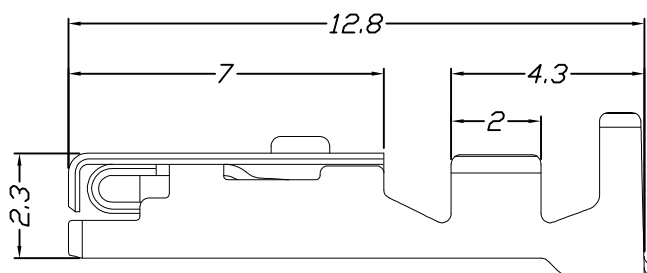


环保物料

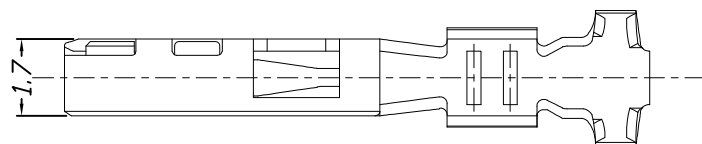

Specifications:

Voltage Rating : 125V AC/DC

Current Rating : Refer to table

Withstand Voltage : 800V AC/minute

Contact Resistance : 20mΩ(MAX.)


Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

Ordering Information & Specifications

Part No	Wire Range	Insulation O. D.	Material	Finish
42204T 0P-**	AWG#28 -#24	0.85mm-1.43mm (0.85mm max)	Phosphor Bronze	Au or Sn
42204T 1P-**	AWG#22 -#18	1.6mm-2.1mm (2.1mm max)	Phosphor Bronze	Au or Sn

Unit: mm

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 <b>康导新能源</b> 网址: www.dgconne.com 电话: 0769-853377633 邮箱: 2850175988@qq.com 传真: 0769-853922827	PART. NO: <b>42204T*P-**</b>	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO: ENDE05	
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE: <b>2.20mm pitch Crimp Terminal</b>
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	REV: AO SHEET: 1/1