
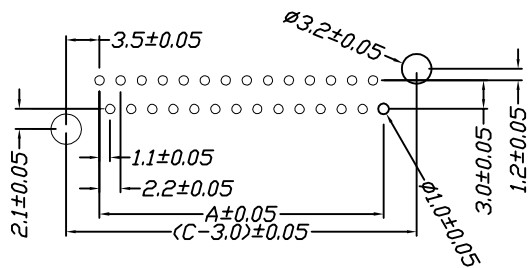
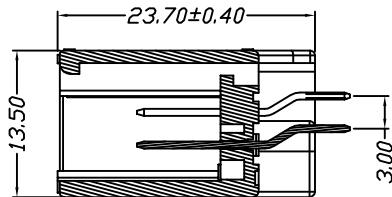
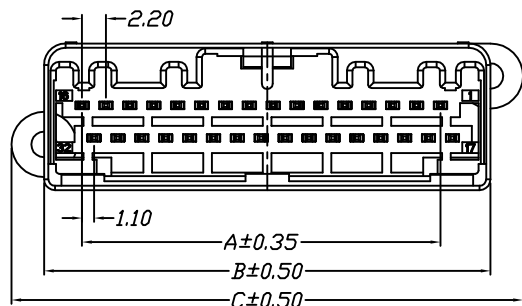


环保物料

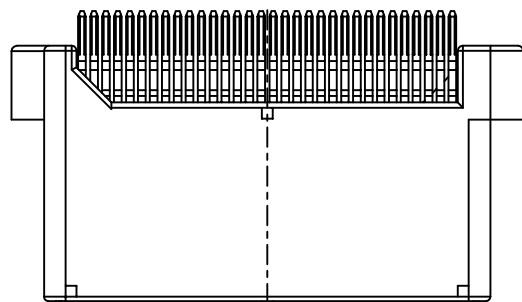

P.C.B. LAYOUT

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 650V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -40°C~+85°C

Part No	Dimensions		
	A	B	C
2*6P	11.00	19.10	25.10
2*8P	15.40	23.50	29.50
2*10P	19.80	27.90	33.90
2*12P	24.20	32.30	38.30
2*14P	28.60	36.70	42.70
2*16P	33.00	41.10	47.10
2*18P	37.40	45.50	51.50
2*20P	41.80	49.90	55.90

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

REV.	新图面发行	2017.06.16	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°			



康导新能源

网址: www.dgconne.com 电话: 0769-85337763
 邮箱: 2850175966@qq.com 传真: 0769-85392262

PART NO:
42202W00-2*NP*-A1-**

DWG. NO:
ENDE05

TITLE:
2.20mm pitch Dual Wafer

REV: AO SHEET: 1/1