
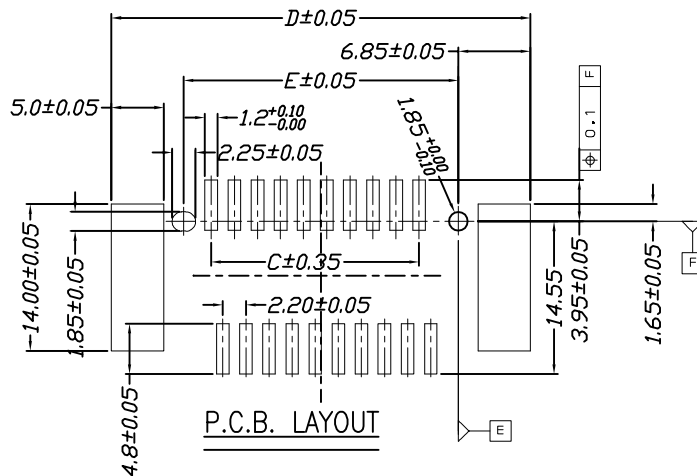
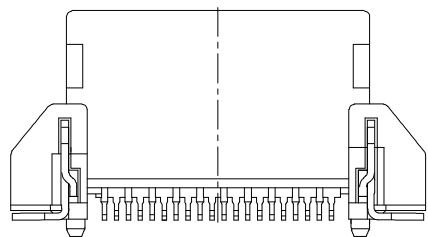



环保物料

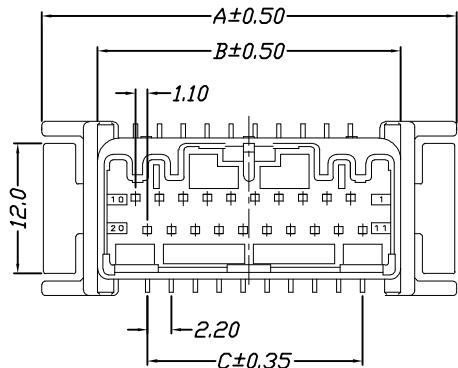

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 3A AC,DC

Withstand Voltage : 650V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -40°C~+85°C

Dimensional Information:

Part No	Dimensions				
	A	B	C	D	E
2*6P	29.40	19.10	11.00	31.10	17.40
2*8P	33.80	23.50	15.40	35.50	21.80
2*10P	38.20	27.90	19.80	39.90	26.20
2*12P	42.60	32.30	24.20	44.30	30.60
2*14P	47.00	36.70	28.60	48.70	35.00
2*16P	51.40	41.10	33.00	53.10	39.40
2*18P	55.80	45.50	37.40	57.50	43.80
2*20P	60.20	49.90	41.80	61.90	48.20

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

GENERAL TOLERANCES		SCALE:	NAME	DATE
		1:1		
LINEAR	ANGLES	APPROVED	黎腾	2017.06.16
0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16
0.00±0.15	X° ±3°	DRAWN	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4
			0.000±0.08	X° X'±2°



康导新能源

网址: www.dgoonne.com 电话: 0769-85337763
邮箱: 2850175968@qq.com 传真: 0769-85392282

PART NO:	42202W00-2*NP*-A2-*	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1

TITLE:
2.20mm pitch Dual Wafer