
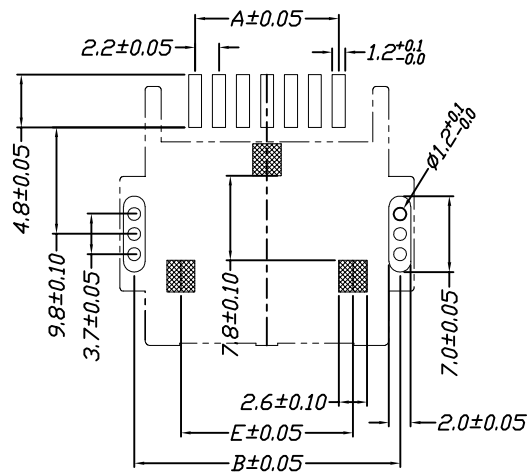

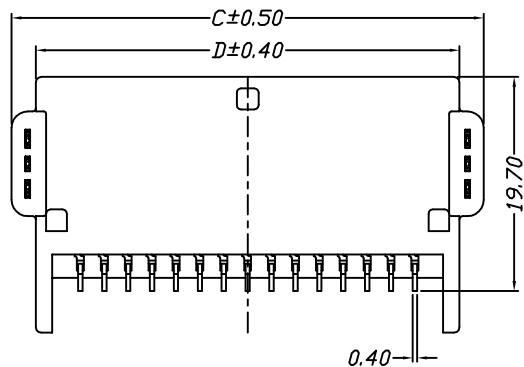


环保物料

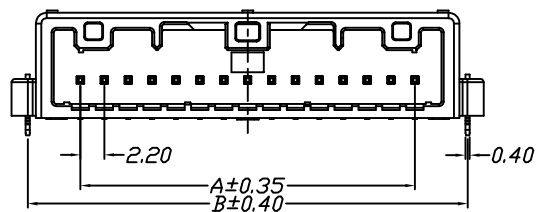

P.C.B. LAYOUT

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 3A AC,DC

Withstand Voltage : 650V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -40°C~+85°C

Part No	Dimensions				
	A	B	C	D	E
3P	4.40	15.60	18.20	13.60	7.00
5P	8.80	20.00	22.60	18.00	11.40
7P	13.20	24.40	27.00	22.40	15.80
9P	17.60	28.80	31.40	26.80	20.20
11P	22.00	33.20	35.80	31.20	24.60
13P	26.40	37.60	40.20	35.60	29.00
15P	30.80	42.00	44.60	40.00	33.40

Material	Color	
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

GENERAL TOLERANCES		SCALE:	NAME	DATE	<p>康导新能源</p> <p>网址: www.dgoonne.com 电话: 0769-85 邮箱: 2850175988@qq.com 传真: 0769-85</p>	PART NO:					
LINEAR	ANGLES	1:1	黎腾	2017.06.16		42202W90-NP*-A2-**					
0.00±0.25	X° REF±6°	APPROVED	肖坤权	2017.06.16		DWG. NO:					
0.00±0.15	X° ±3°	DESIGNER	旷淇	2017.06.16		ENDE05					
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	TITLE:	2.20mm pitch Single Wafer	REV: A0	SHEET: 1/1