


环保物料

Specifications:
 Voltage Rating : 125V AC/DC
 Current Rating : 2A AC,DC
 Withstand Voltage : 600V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

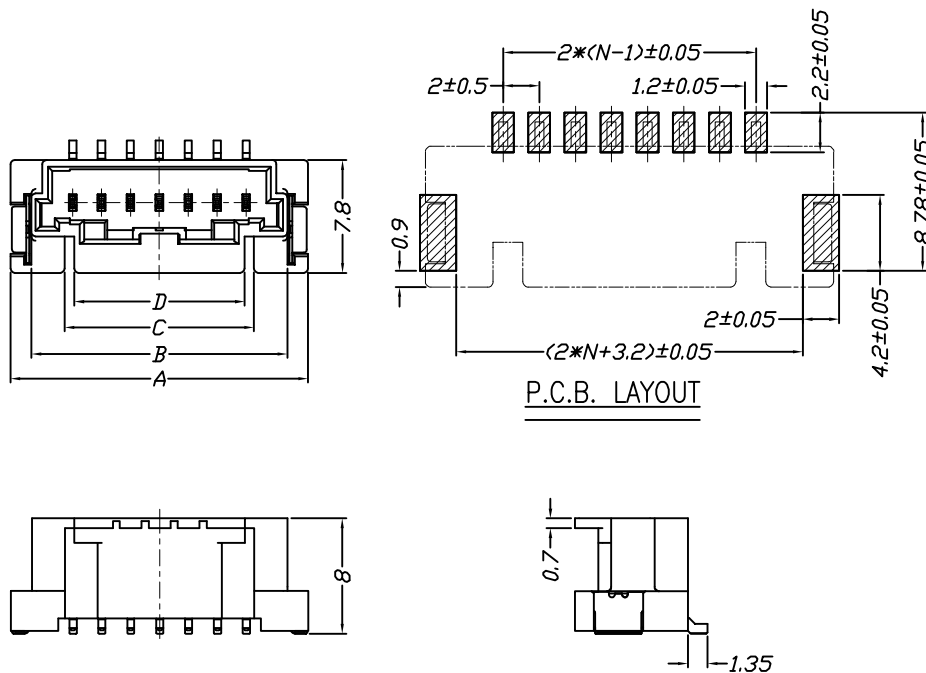

Unit: mm

Part No.	Dimensions			
	A	B	C	D
2P	10.90	8.00	—	6.30
3P	12.60	9.70	6.00	5.80
4P	14.60	11.70	8.00	7.80
5P	16.60	13.70	10.00	9.80
6P	18.60	15.70	12.00	11.80
7P	20.60	17.70	13.10	11.80
9P	24.60	21.70	17.10	11.80
10P	26.60	23.70	19.10	11.80
11P	28.60	25.70	21.10	11.80
12P	30.60	27.70	23.10	11.80
13P	32.60	29.70	25.10	11.80
14P	34.60	31.70	27.10	11.80
15P	36.60	33.70	29.10	11.80

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

		GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART NO:		
		LINEAR	ANGLES	1:1	APPROVED	黎腾		2017.06.16	42012W00-NP*-A1-**	
		0.0±0.25	X° REF±6°		DESIGNER	肖坤权		2017.06.16	DWG. NO:	
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DRAWN		旷淇	2017.06.16	ENDE05
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				REV: A0	SHEET: 1/1