

环保物料

Specifications:

Voltage Rating : 125V AC/DC





Current Rating : 2A AC,DC

Withstand Voltage : 600V AC/minute

Contact Resistance : 40mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+105°C

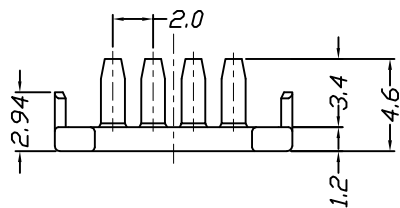

Unit: mm

Part No.	Dimensions		
	A	B	C
2P	7.80	3.80	3.80
3P	9.80	5.80	5.80
4P	11.80	7.80	7.80
5P	13.80	9.80	9.80
6P	15.80	11.80	11.80
7P	17.80	13.80	13.80
8P	19.80	10.40	15.80
9P	21.80	10.40	17.80
10P	23.80	10.40	19.80
11P	25.80	10.40	21.80
12P	27.80	10.40	23.80
13P	29.80	10.40	25.80
14P	31.80	10.40	27.80
15P	33.80	10.40	29.80

Material	Color
PBT,UL94V-0	Gray

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>康导新能源</b> 网址: www.dgconne.com 电话: 0769-8533763 邮箱: 2850175988@qq.com 传真: 0769-8539282	PART. NO: <b>42012R01-NP*-66</b>	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO: ENDE05	
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE: <b>2.00mm pitch Retainer</b>
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	REV: A0 SHEET: 1/1