

环保物料

Specifications:

Voltage Rating : 125V AC/DC



Current Rating : 2A AC,DC

Withstand Voltage : 600V AC/minute

Contact Resistance : 40mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+105°C

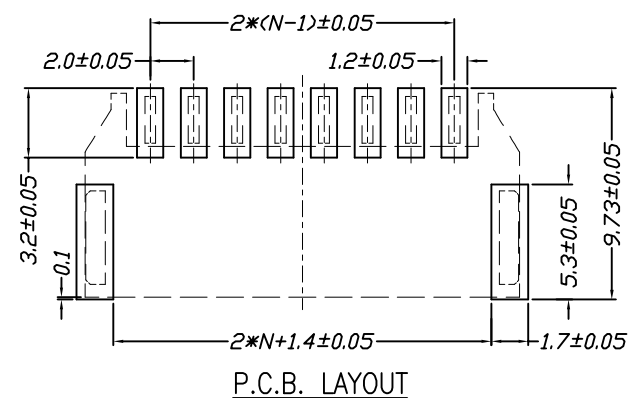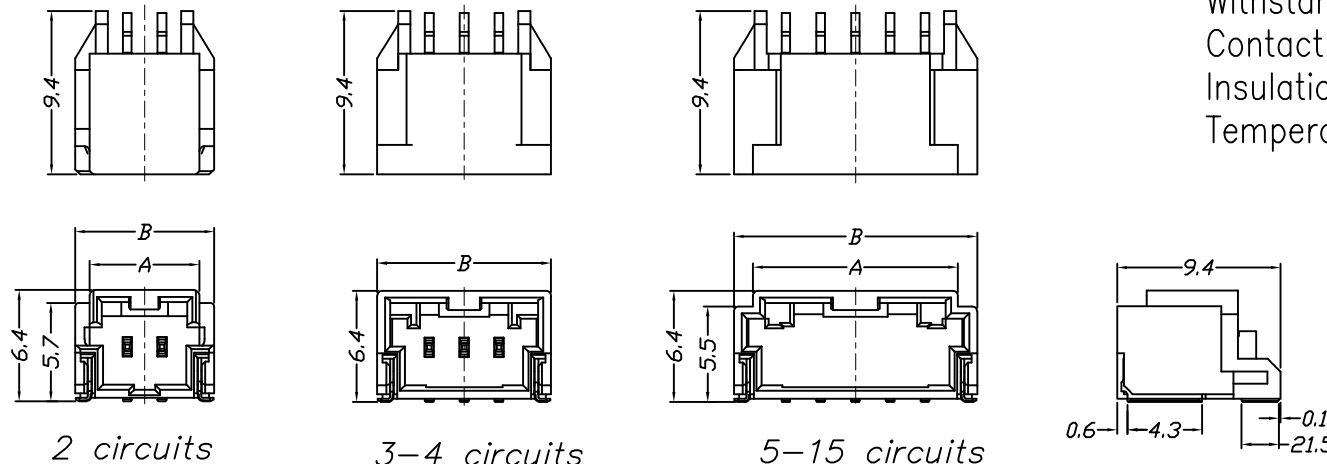

Unit: mm

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2P	6.30	8.00	9P	11.80	22.00
3P	-	10.00	10P	11.80	24.00
4P	-	12.00	11P	11.80	26.00
5P	11.80	14.00	12P	11.80	28.00
6P	11.80	16.00	13P	11.80	30.00
7P	11.80	18.00	14P	11.80	32.00
8P	11.80	20.00	15P	11.80	34.00

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
			SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175986@qq.com 传真: 0769-85392827

TITLE:
2.00mm pitch Single Wafer

PART NO: 42012W90-NP*-A1-**
DWG NO: ENDE05
REV: A0 SHEET: 1/1