







环保物料

42011W90-NP*-A1-**

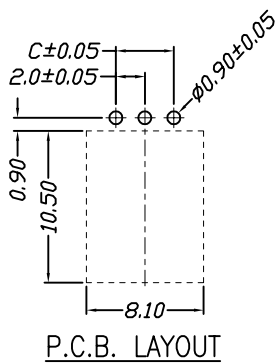

42011W90-NP*-B3-**

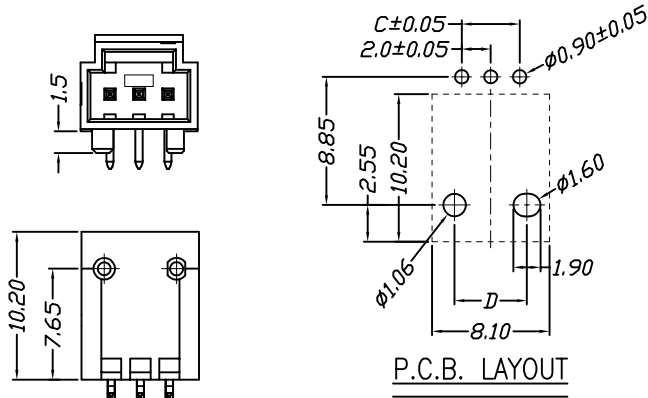

Specifications:

Voltage Rating : 125V AC/DC

Current Rating : 2A AC,DC

Withstand Voltage : 500V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+70°C

Unit: mm

Part No.	Dimensions			
	A	B	C	D
2P	6.10	4.70	2.00	3.00
3P	8.10	6.70	4.00	5.00
4P	10.10	8.70	6.00	7.00
5P	12.10	10.70	8.00	9.00
6P	14.10	12.70	10.00	11.00
7P	16.10	14.70	12.00	13.00
8P	18.10	16.70	14.00	15.00
9P	20.10	18.70	16.00	17.00
10P	22.10	20.70	18.00	19.00

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16


康导新能源
 网址: www.dgconne.com 电话: 0769-85337833
 邮箱: 2850175986@qq.com 传真: 0769-85392827
 TITLE: **2.00mm pitch Single Wafer**

PART NO:	42011W90-NP*-**-**	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1