




环保物料

42011W00-NP*-A2-**






42011W00-NP*-B1-**

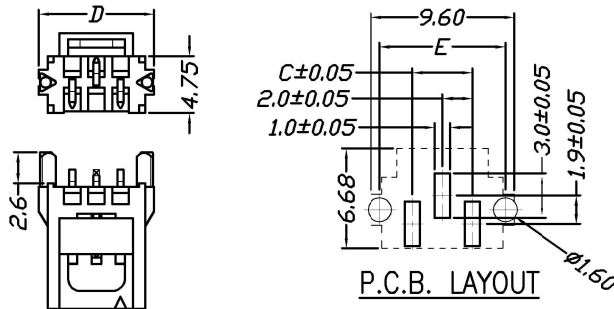

Specifications:
 Voltage Rating : 125V AC/DC
 Current Rating : 2A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+70°C

Unit: mm



Part No.	Dimensions				
	A	B	C	D	E
2P	6.10	4.70	2.00	7.60	6.40
3P	8.10	6.70	4.00	9.60	8.40
4P	10.10	8.70	6.00	11.60	10.40
5P	12.10	10.70	8.00	13.60	12.40
6P	14.10	12.70	10.00	15.60	14.40
7P	16.10	14.70	12.00	17.60	16.40
8P	18.10	16.70	14.00	19.60	18.40
9P	20.10	18.70	16.00	21.60	20.40
10P	22.10	20.70	18.00	23.60	22.40

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

				GENERAL TOLERANCES		SCALE:	NAME	DATE
				LINEAR	ANGLES	1:1		
				0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgoonne.com 电话: 0769-85337633
 邮箱: 2850175966@qq.com 传真: 0769-85302827

TITLE:
 2.00mm pitch Single Wafer

PART. NO: 42011W00-NF*-**	
DWG. NO: ENDE05	
REV: A0	SHEET: 1/1