




环保物料

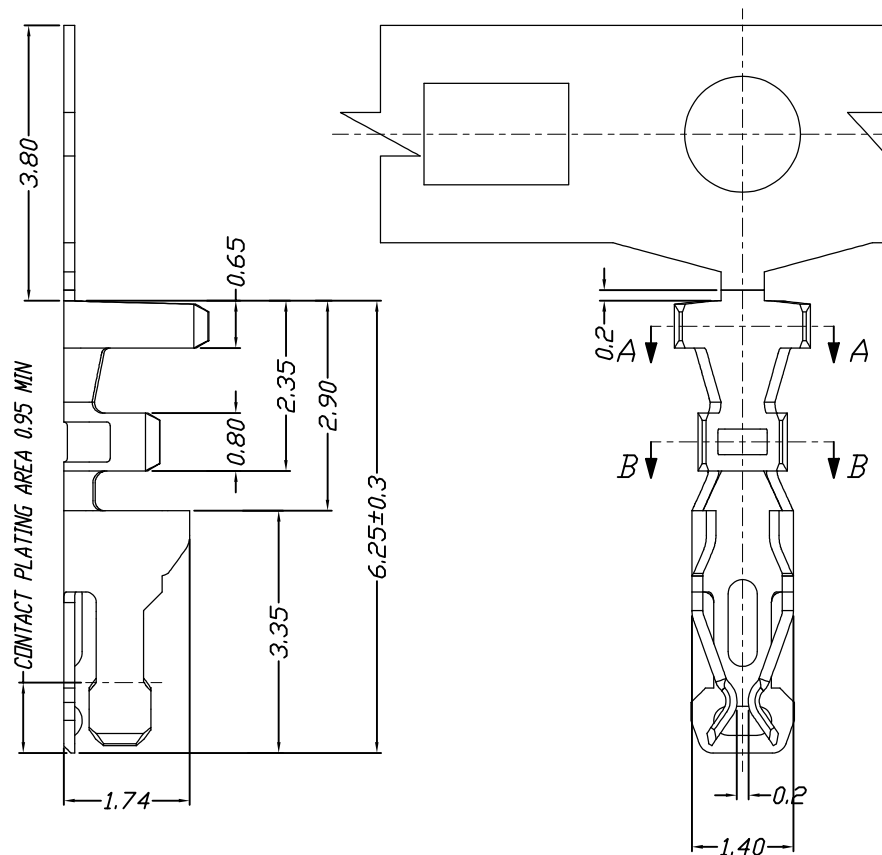

Specifications:  
 Voltage Rating : 125V AC/DC  
 Current Rating : 2A AC,DC  
 Withstand Voltage : 600V AC/minute  
 Contact Resistance : 40mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -40°C~+105°C



SECTION B-B



SECTION A-A

Ordering Information & Specifications

Part No	Wire Range	Insulation O. D.	Material	Finish
42010TOP -**	AWG#30 -#24	0.8mm-1.4mm (1.4mm max)	Phosphor Bronze	Au or Sn

Unit: mm

		GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgconne.com 电话: 0769-85387633 邮箱: 2850175986@qq.com 传真: 0769-85382827	PART. NO:	
		LINEAR	ANGLES	1:1	黎腾	2017.06.16		42010TOP-**	
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE:
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	2.00mm pitch Crimp Terminal
								DWG. NO:	ENDE05
								REV:	AO
								SHEET:	1/1