
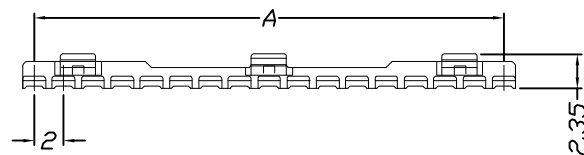


环保物料

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 3A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 10mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

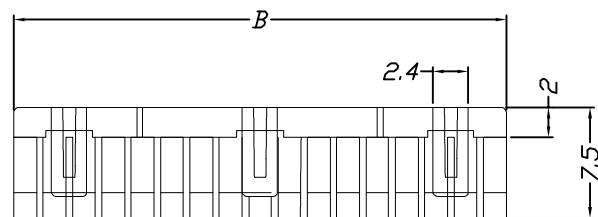

Unit: mm

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
4P	6.00	7.55	13P	24.00	25.55
5P	8.00	9.55	14P	26.00	27.55
6P	10.00	11.55	15P	28.00	29.55
7P	12.00	13.55	16P	30.00	31.55
8P	14.00	15.55	17P	32.00	33.55
9P	16.00	17.55	18P	34.00	35.55
10P	18.00	19.55	19P	36.00	37.55
11P	20.00	21.55	20P	38.00	39.55
12P	22.00	23.55	21P	40.00	41.55

Material	Color
PA66,UL94V-0	Gray

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°			

**康导新能源**  
 网址: www.dgoonne.com 电话: 0769-86337633  
 邮箱: 2850176986@qq.com 传真: 0769-86392827  
 TITLE: **2.00mm pitch Retainer**

PART NO:	<b>42009R00-NP*-66</b>	
DWG NO:	ENDE05	
REV:	AO	SHEET: 1/1