

环保物料

Specifications:

Voltage Rating : 250V AC/DC



Current Rating : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

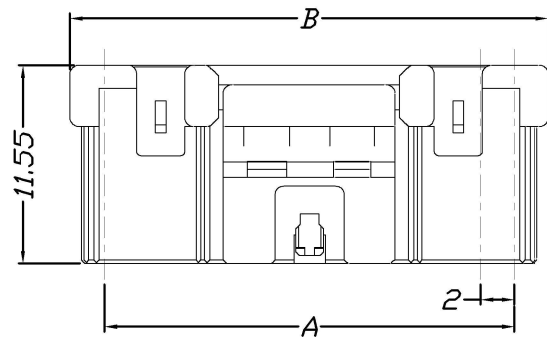

Unit: mm

Part No.	Dimensions	
	A	B
2*5P	8.00	12.00
2*6P	10.00	14.00
2*7P	12.00	16.00
2*8P	14.00	18.00
2*9P	16.00	20.00
2*10P	18.00	22.00
2*11P	20.00	24.00
2*12P	22.00	26.00
2*13P	24.00	28.00
2*15P	28.00	32.00

Material	Color
PBT,UL94V-0	Gray

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>康导新能源</b> 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85362827	PART. NO: 42007H00-2*NP*-PT	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO: ENDE05	
		0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	旷淇	2.00mm pitch Dual Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				