

环保物料

Specifications:

Voltage Rating : 50V AC/DC




Current Rating : 3A AC,DC

Withstand Voltage : 1000V AC/minute

Contact Resistance : 8mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -40°C~+100°C

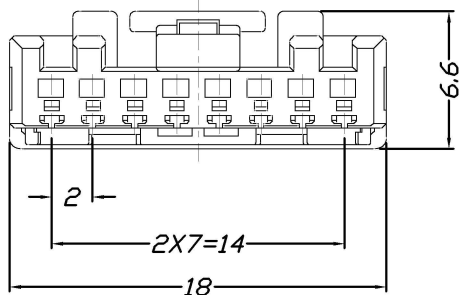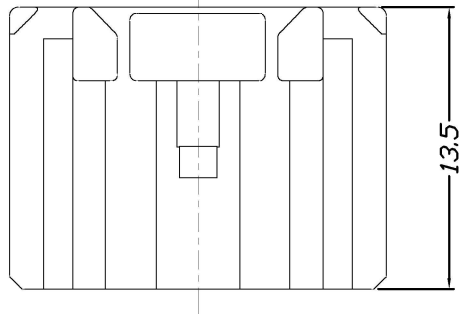

Part No	Dimensions	
	A	B
2P	2.00	6.00
4P	6.00	10.00
8P	14.00	18.00

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16
				0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16



TITLE:
2.00mm pitch Single Housing

PART. NO: 42003H00-NP*-PT	
DWG. NO: ENDE05	
REV: A0	SHEET: 1/1