
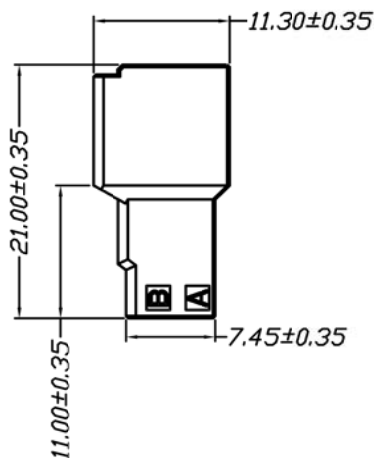
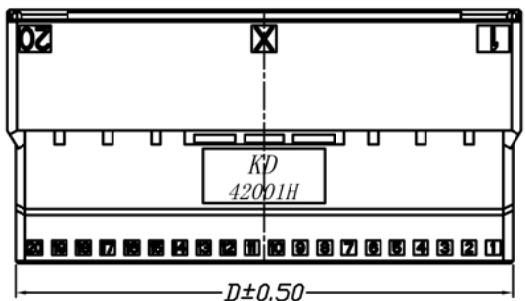


环保物料

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

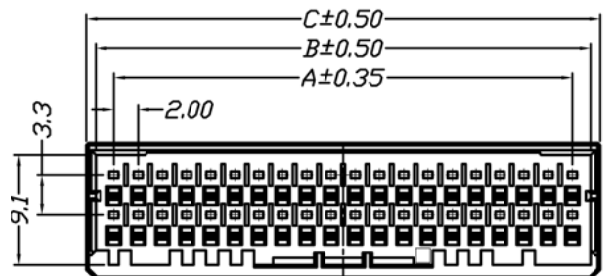

Part No	Dimensions			
	A	B	C	D
2*5P	8.0	11.0	12.6	11.2
2*10P	18.0	21.0	22.6	21.2
2*11P	20.0	23.0	24.6	23.2
2*13P	24.0	27.0	28.6	27.2
2*14P	26.0	29.0	30.6	29.2
2*16P	30.0	33.0	34.6	33.2
2*17P	32.0	35.0	36.6	35.2
2*20P	38.0	41.0	42.6	41.2
Material		Color		
PBT,UL94V-0		Gray		

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源  网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART NO: 32001H01-2*NPA-2-PT	
LINEAR	ANGLES	1:1	APPROVED	黎腾			2017.06.16
0.0±0.25	X° REF±6°		DESIGNER	肖坤权			2017.06.16
0.00±0.15	X° ±3°		DRAWN	旷洪			2017.06.16
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	TITLE: 2.00mm pitch Dual Housing	REV: A0 SHEET: 1/1	