


环保物料

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -55°C~+105°C

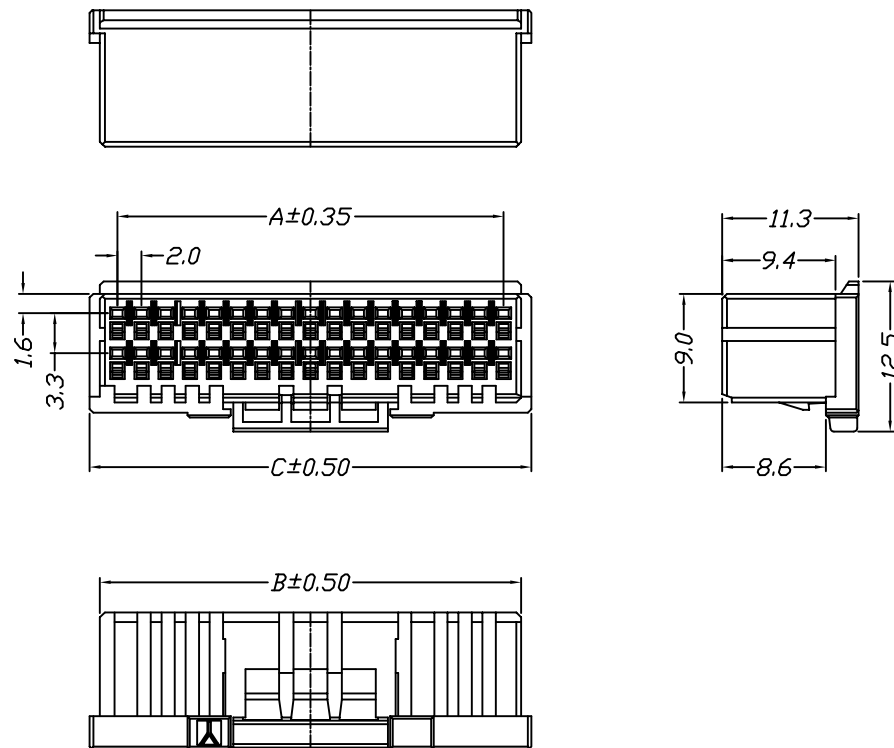

Part No	Dimensions		
	A	B	C
2*5P	8.00	10.90	12.60
2*10P	18.00	20.90	22.60
2*11P	20.00	22.90	24.60
2*13P	24.00	26.90	28.60
2*14P	26.00	28.90	30.60
2*15P	28.00	30.90	32.60
2*16P	30.00	32.90	34.60
2*17P	32.00	34.90	36.60
2*20P	38.00	40.90	42.60
Material		Color	
PA66,UL94V-0		Gray	

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16



TITLE:
2.00mm pitch Dual Housing

PART NO: 42001H00-2*NPA-PT
DWG. NO: ENDE05
REV: A0 SHEET: 1/1