

环保物料

Specifications:

Voltage Rating : 250V AC/DC


Current Rating : 3A AC,DC

Withstand Voltage : 1000V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -55°C~+105°C

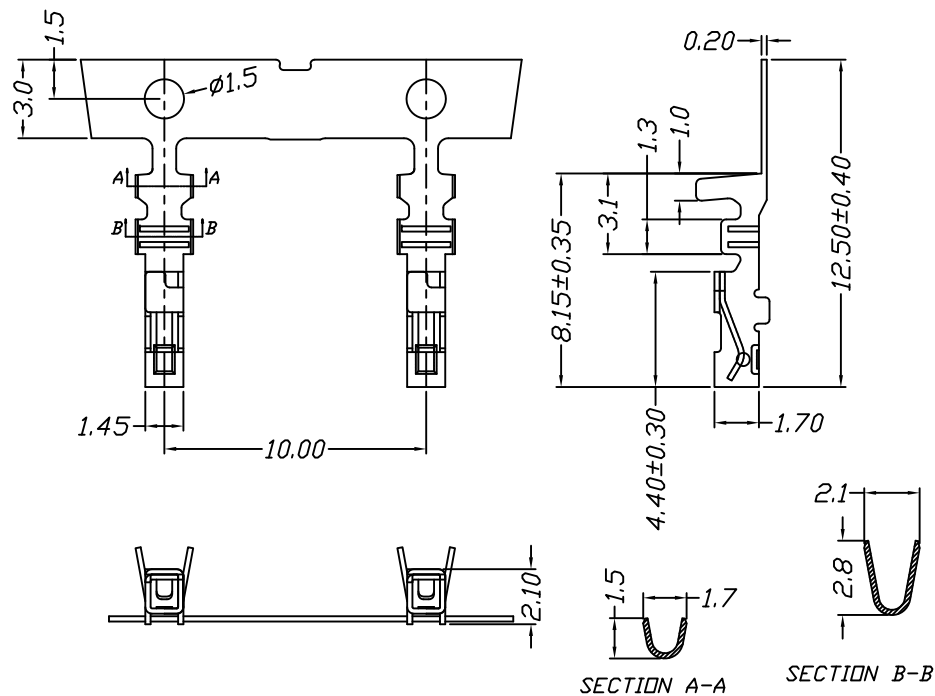

Ordering Information & Specifications

Part No	Wire Range	Insulation O. D.	Material	Finish
42001T0	AWG#22	1.00mm	Phosphor	Au or Sn
P-**-B	-#28	(max)	Bronze	

Unit: mm

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO:						
LINEAR	ANGLES	1:1	黎腾	2017.06.16		42001TOP-**-B						
0.00±0.35	X° REF±6°	APPROVED	肖坤权	2017.06.16		DWG. NO:						
0.00±0.25	X° ±3°	DESIGNER	旷淇	2017.06.16		ENDE05						
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	TITLE:	2.00mm pitch Crimp Terminal	REV:	A0	SHEET:	1/1