

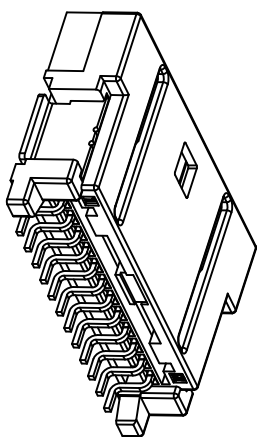
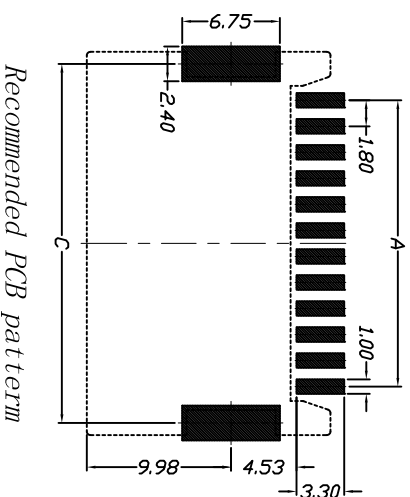
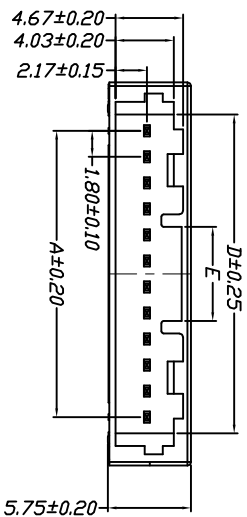


环保物料



Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 1A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

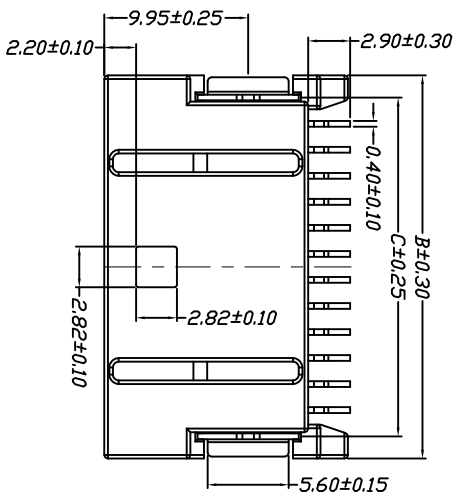

Poles	Dim A	Dim B	Dim C	Dim D	Dim E
4	5.40	12.10	9.03	7.64	2.90
5	7.20	13.90	10.83	9.44	2.90
6	9.00	15.70	12.63	11.24	2.90
7	10.80	17.50	14.43	13.04	2.90
8	12.60	19.30	16.23	14.84	2.90
9	14.40	21.10	18.03	16.64	2.90
10	16.20	22.90	19.83	18.44	6.50
11	18.00	24.70	21.63	20.24	6.50
12	19.80	26.50	23.43	22.04	6.50
13	21.60	28.30	25.23	23.84	6.50
14	23.40	30.10	27.03	25.64	6.50
15	25.20	31.90	28.83	27.44	6.50
16	27.00	33.70	30.63	29.24	6.50
17	28.80	35.50	32.43	31.04	6.50
18	30.60	37.30	34.23	32.84	6.50
19	32.40	39.10	36.03	34.64	6.50
20	34.20	40.90	37.83	36.44	6.50

Material LCP/PAUL94V-0
 Color BLACK
 Pin Material Bronze/Gold&Ni-plated

康导新能源
 地址: www.dgconna.com 电话: 0769-85337333
 网址: 20001769888@qq.com 传真: 0769-85332827

PART NO.: 41801W90-NPA-B2-***

GENERAL TOLERANCES
 LINEAR 0.0±0.35
 ANGLES X° REF±6°
 X° X'±2°

SCALE: 1:1
 APPROVED 黎腾 2017.06.16
 DESIGNER 肖坤权 2017.06.16

NAME 黎腾
 DATE 2017.06.16

REV: A0

UNIT: MM
 SIZE: A4
 0.000±0.15

TITLE: 1.80mm PITCH 90° Single Water SMT Type

REV: A0 SHEET: 1/1

1 2 3 4 5 6 7 8