

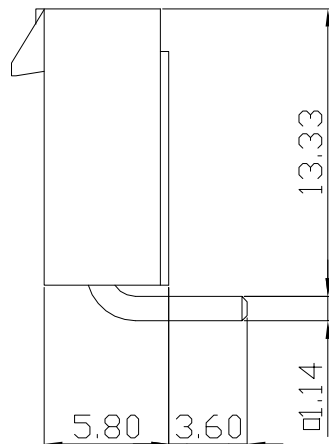


环保物料

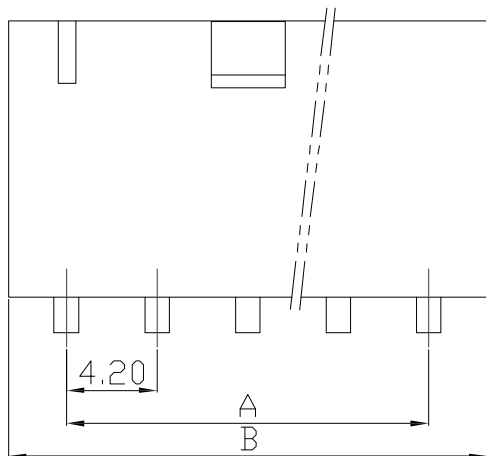

主要技术参数 Main Specifications

线 数 (Poles): 02 to 06
 接触电阻 (Contact resistance): $\leq 15m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 300V AC DC
 额定电流 (Rated current): 9.0A AC DC
 耐 电 压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

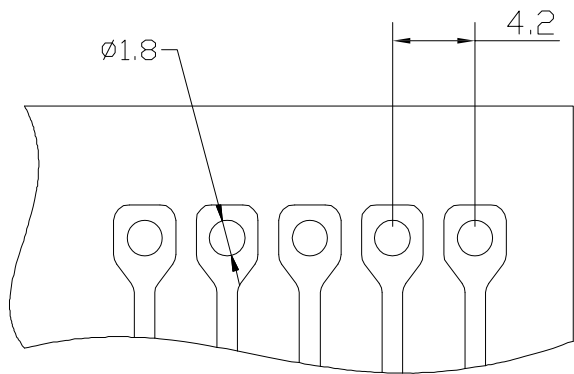

PCB Layout

Poles	Dimensions mm	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

2		Wafer 针	Brass Tin 黄铜镀锡	N	
1		Housing 基座	PA66 (UL94V-0/V-2)	1	White (白色)
序号	图 号	名称	材 料	数量	附 注

		GENERAL TOLERANCES		SCALE:	NAME	DATE	康 导 新 能 源	PART. NO: 24202AW
		LINEAR	ANGLES	1:1	APPROVED	黎腾		
		0.0±0.35	X° REF±6°		DESIGNER	肖坤权	2017.06.16	DWG. NO:
AO	新图面发行	0.00±0.25	X° ±3°		DRAWN	旷淇	2017.06.16	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	TITLE: 4.20mmPITCH 90° WAFER DIP TYPE		REV: AO SHEET: 1/1

康 导 新 能 源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:
24202AW
 DWG. NO:
 REV: AO SHEET: 1/1