

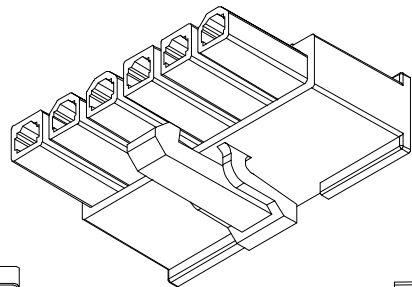


环保物料


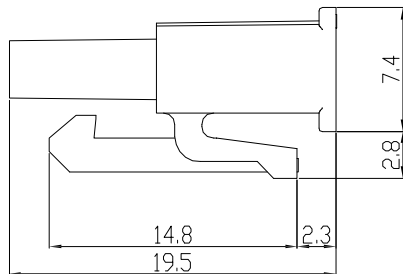


主要技术参数 Main Specifications

线数 (Poles): 02 to 06
 接触电阻 (Contact resistance): $\leq 15m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 300V AC DC
 额定电流 (Rated current): 9.0A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$


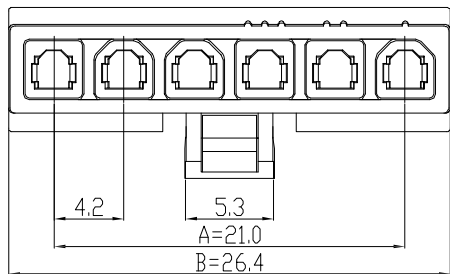


6P

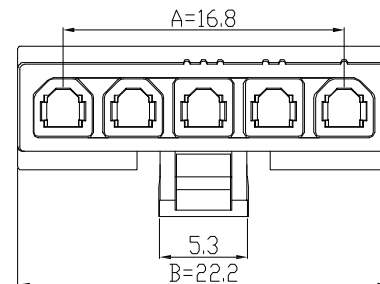


4P

5P

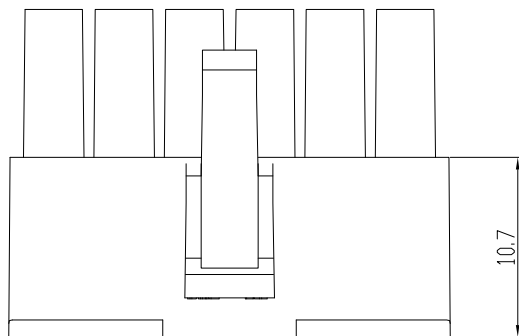

2P



3P

Poles	Dimensions mm	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

1	Housing 胶壳	PA66 (UL94V-0/V-2)	1	Transparent or Black 透明白色/黑色
序号	图号名称	材料	数量	附注

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<p>康导新能源</p> <p>网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827</p>	PART. NO: 24201Y1	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:	
AO		0.00±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.15	X° X'±2°		DRAWN 旷淇 2017.06.16	