
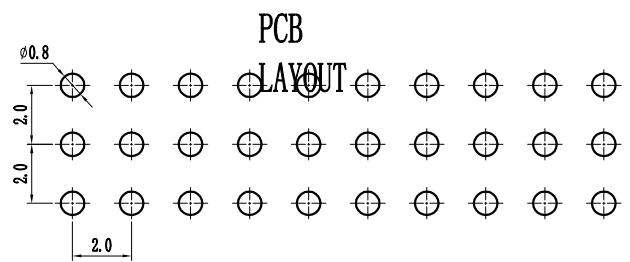
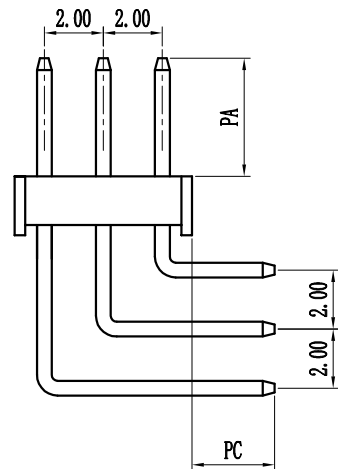
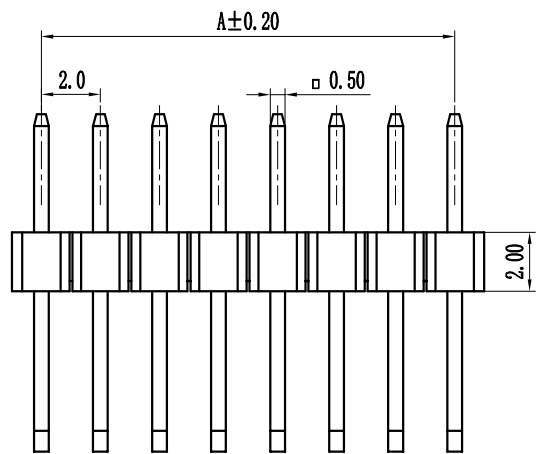


环保物料

Pin数	尺寸A	尺寸B
3x1	-	2.0
3x2	2.0	4.0
3x3	4.0	6.0
3x4	6.0	8.0
3x5	8.0	10.0
3x6	10.0	12.0
3x7	12.0	14.0
3x8	14.0	16.0
3x9	16.0	18.0
3x10	18.0	20.0
3x11	20.0	22.0
3x12	22.0	24.0
3x13	24.0	26.0
3x14	26.0	28.0
3x15	28.0	30.0
3x16	30.0	32.0
3x17	32.0	34.0
3x18	34.0	36.0
3x19	36.0	38.0
3x20	38.0	40.0
3x21	40.0	42.0
3x22	42.0	44.0
3x23	44.0	46.0
3x24	46.0	48.0
3x25	48.0	50.0
3x26	50.0	52.0
3x27	52.0	54.0
3x28	54.0	56.0
3x29	56.0	58.0
3x30	58.0	60.0
3x31	60.0	62.0
3x32	62.0	64.0
3x33	64.0	66.0
3x34	66.0	68.0
3x35	68.0	70.0
3x36	70.0	72.0
3x37	72.0	74.0
3x38	74.0	76.0
3x39	76.0	78.0
3x40	78.0	80.0
3x41	80.0	82.0
3x42	82.0	84.0
3x43	84.0	86.0
3x44	86.0	88.0
3x45	88.0	90.0
3x46	90.0	92.0
3x47	92.0	94.0
3x48	94.0	96.0
3x49	96.0	98.0
3x50	98.0	100.0
3x51	100.0	102.0
3x52	102.0	104.0

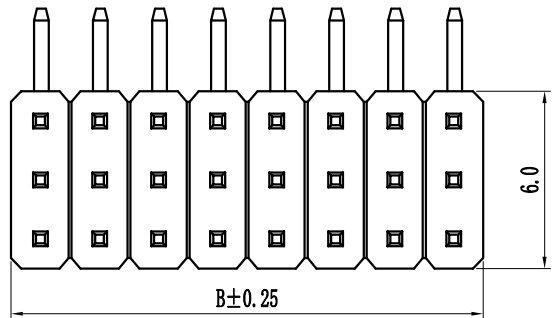

Specification:
 Current Rating : 2AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Height
 H=1.0mm、1.5mm、2.0mm、3.0mm

P 20 9D-XXX X X-XX-X-XXX								
①	②	③	④	⑤	⑥	⑦	⑧	⑨
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:		⑤ Insulator Color:			
P=Pin Header	08-0.80	9D=Right Angle DIP Type	Single Row	Double Row	A:Black	B:Brown	C:Red	
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin	201=2*1Pin	D:Orange	E:Yellow	F:Green	
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin	202=2*2Pin	G:Blue	H:Violet	J:Gray	
E=jector Header	20=2.00	0S=Horizontal SMT Type	! !	! !	K:White	P:Light Blue		
	25=2.54		140=1*40pin	240=2*40pin				
	39=3.96							
	50=5.08							
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:		⑨ Customer Code				
A-PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request						
B-PA46	0A-Sn-Au 1u" 0P-Sn-Au 10u" 5A-Au 1u"	1:RoHS						
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 6B-Au 2u"	2:HF (Halogen Free)						
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"							
B-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" !							
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"							

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 康导新能源 网址: www.dgconne.com 电话: 0789-85337833 邮箱: 2850175988@qq.com 传真: 0789-85392827	PART. NO:			
LINER	ANGLES	1:1	黎腾	2017.06.16		KDPH-0067			
0.00±0.25	X° REF±6°	APPROVED	肖坤权	2017.06.16		DWG. NO:			
0.00±0.15	X° ±3°	DESIGNER	旷淇	2017.06.16		ENDE0067			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	TITLE: Pitch2.00mm Pin Header, Single Plastic, Triple Row, Right Angle Type	REV: AO	SHEET: 1/1