
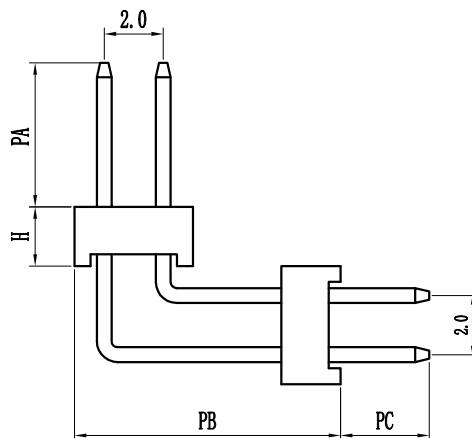
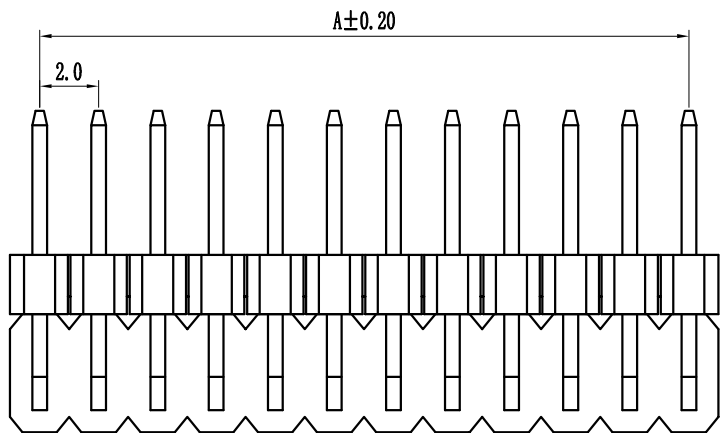


环保物料


Pin数	尺寸A	尺寸B
2X1	-	2.0
2X2	2.0	4.0
2X3	4.0	6.0
2X4	6.0	8.0
2X5	8.0	10.0
2X6	10.0	12.0
2X7	12.0	14.0
2X8	14.0	16.0
2X9	16.0	18.0
2X10	18.0	20.0
2X11	20.0	22.0
2X12	22.0	24.0
2X13	24.0	26.0
2X14	26.0	28.0
2X15	28.0	30.0
2X16	30.0	32.0
2X17	32.0	34.0
2X18	34.0	36.0
2X19	36.0	38.0
2X20	38.0	40.0
2X21	40.0	42.0
2X22	42.0	44.0
2X23	44.0	46.0
2X24	46.0	48.0
2X25	48.0	50.0
2X26	50.0	52.0
2X27	52.0	54.0
2X28	54.0	56.0
2X29	56.0	58.0
2X30	58.0	60.0
2X31	60.0	62.0
2X32	62.0	64.0
2X33	64.0	66.0
2X34	66.0	68.0
2X35	68.0	70.0
2X36	70.0	72.0
2X37	72.0	74.0
2X38	74.0	76.0
2X39	76.0	78.0
2X40	78.0	80.0
2X41	80.0	82.0
2X42	82.0	84.0
2X43	84.0	86.0
2X44	86.0	88.0
2X45	88.0	90.0
2X46	90.0	92.0
2X47	92.0	94.0
2X48	94.0	96.0
2X49	96.0	98.0
2X50	98.0	100.0
2X51	100.0	102.0
2X52	102.0	104.0

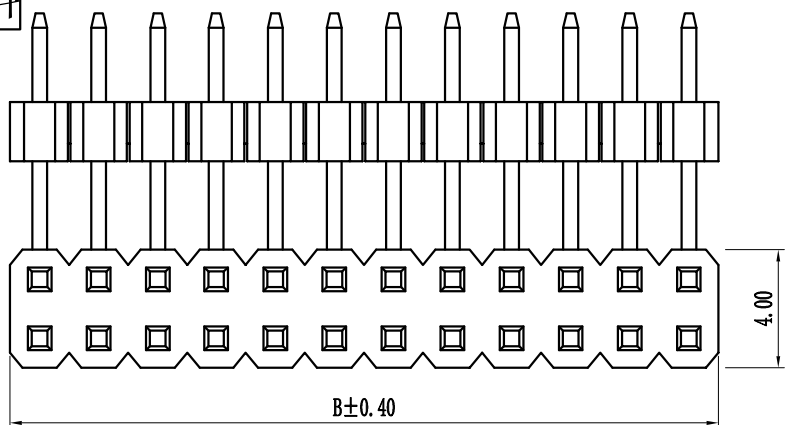

Specification:
 Current Rating : 2AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Height
H=1.0mm, 1.5mm, 2.0mm, 3.0mm

PCB LAYOUT

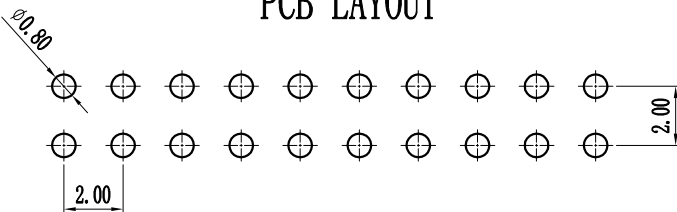

P 20 9D-XXX X X-XX-X-XXX				
①	②	③	④	⑤
① Series No:	② Pitch:	③ Tail/Mounting Style:	④ No. of Pins:	⑤ Insulator Color:
P=Pin Header	08-0.80	9D=Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red
F=Female Header	10-1.00	9S=Straight SMT Type	101-1*1Pin 201-2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12-1.27	0D=Straight DIP Type	102-1*2Pin 202-2*2Pin	G:Blue H:Violet J:Gray
E=Injector Header	20-2.00	0S=Horizontal SMT Type	140-1*40pin 240-2*40pin	K:White P:Light Blue
	25-2.54			
	39-3.96			
	50-5.08			
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code	
A-PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request		
B-PA66	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS		
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)		
D-PA6T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"			
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"			
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5E-Au 5u"			

		GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源	PART. NO:		
		LINEAR	ANGLES	1:1	黎腾	2017.06.16		KDPH-0061		
		0.0±0.25	X° REF±6°	APPROVED			网址: www.dgonne.com 电话: 0769-85337833 邮箱: 285017888@qq.com 传真: 0769-85382827	DWG. NO:		
AO	新图面发行	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16		ENDE0061		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	TITLE: Pitch2.00mm Pin Header, Dual Plastic, Dual Row, Right Angle Type	REV: AO SHEET: 1/1