


环保物料

Pin数	尺寸A	尺寸B
2X2	2.54	5.58
2X3	5.08	8.12
2X4	7.62	10.66
2X5	10.16	13.20
2X6	12.70	15.74
2X7	15.24	18.28
2X8	17.78	20.82
2X9	20.32	23.36
2X10	22.86	25.90
2X11	25.40	28.44
2X12	27.94	30.98
2X13	30.48	33.52
2X14	33.02	36.06
2X15	35.56	38.60
2X16	38.10	41.14
2X17	40.64	43.68
2X18	43.18	46.22
2X19	45.72	48.76
2X20	48.26	51.30
2X21	50.80	53.84
2X22	53.34	56.38
2X23	55.88	58.92
2X24	58.42	61.46
2X25	60.96	64.00
2X26	63.50	66.54
2X27	66.04	69.08
2X28	68.58	71.62
2X29	71.12	74.16
2X30	73.66	76.70
2X31	76.20	79.24
2X32	78.74	81.78
2X33	81.28	84.32
2X34	83.82	86.86
2X35	86.36	89.40
2X36	88.90	91.94
2X37	91.44	94.48
2X38	93.98	97.02
2X39	96.52	99.56
2X40	99.06	102.10

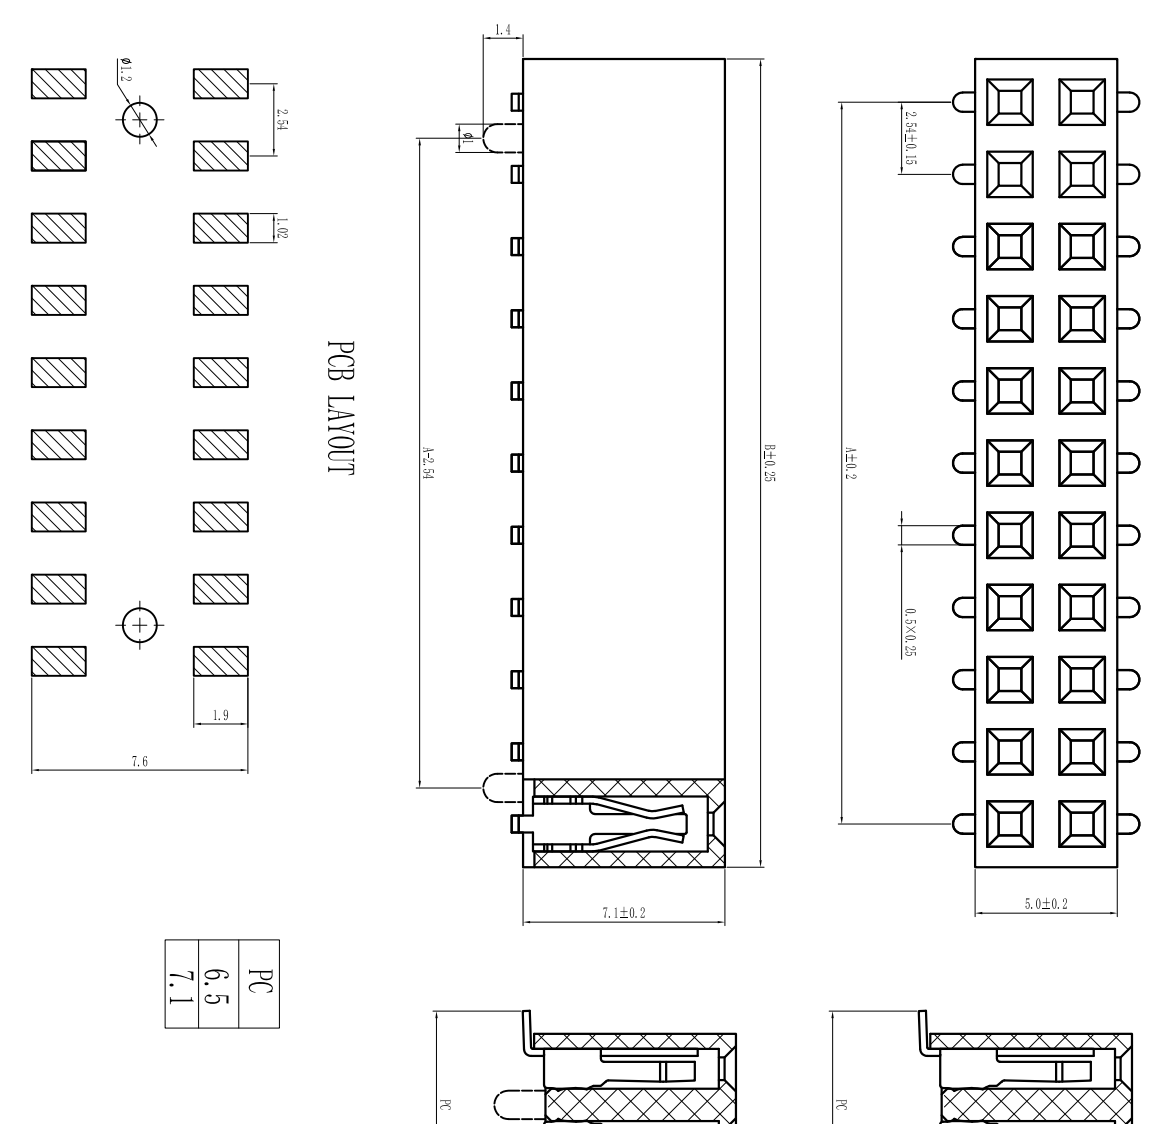

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.08	X° X'±2°	SCALE: 1:1	NAME	DATE	TITLE:	PART. NO:
A0	新图面发行	2017.06.16	MM	A4	0.00±0.15	X° ±3°	1:1	肖坤权	2017.06.16	Plastic Height 7.1mm, SMT (with Local Peg) Type (U)	KDFH-0148
1								尹琪	2017.06.16		ENDE1148
<p>GENERAL TOLERANCES</p> <p>LINEAR: 0.0±0.25 ANGLES: X° REF±6°</p> <p>PCB LAYOUT</p> <p>PC: 6.5, 7.1</p> <p>Material Type: A-FBI, B-PA66, C-PA6T, D-PA9T, E-LCP</p> <p>Plating Type: 0=Sn-1u, 1=Sn-1u, 2=Sn-1u, 3=Sn-1u, 4=Sn-1u, 5=Sn-1u, 6=Sn-1u, 7=Sn-1u, 8=Sn-1u, 9=Sn-1u, 10=Sn-1u, 11=Sn-1u, 12=Sn-1u, 13=Sn-1u, 14=Sn-1u, 15=Sn-1u, 16=Sn-1u, 17=Sn-1u, 18=Sn-1u, 19=Sn-1u, 20=Sn-1u, 21=Sn-1u, 22=Sn-1u, 23=Sn-1u, 24=Sn-1u, 25=Sn-1u, 26=Sn-1u, 27=Sn-1u, 28=Sn-1u, 29=Sn-1u, 30=Sn-1u, 31=Sn-1u, 32=Sn-1u, 33=Sn-1u, 34=Sn-1u, 35=Sn-1u, 36=Sn-1u, 37=Sn-1u, 38=Sn-1u, 39=Sn-1u, 40=Sn-1u, 41=Sn-1u, 42=Sn-1u, 43=Sn-1u, 44=Sn-1u, 45=Sn-1u, 46=Sn-1u, 47=Sn-1u, 48=Sn-1u, 49=Sn-1u, 50=Sn-1u</p> <p>Series No: Pin Header, Flexible Header, Back Header, Detector Header</p> <p>Pitch: 0=0.80, 1=1.00, 12=1.27, 20=2.00, 25=2.54, 38=4.96, 50=6.08</p> <p>Radius: 0=0.80, 1=1.00, 12=1.27, 20=2.00, 25=2.54, 38=4.96, 50=6.08</p> <p>Material: Insulator: Polyester (UL94V-0), Contact: Bronze, Plating: Au or Sn Over 50u" Ni</p> <p>Specification: Current Rating: 3AMP Temperature Range: -40°C to +105°C Contact Resistance: 20mΩ Max Insulation Resistance: 1000MΩ Min Withstanding Voltage: AC 1000V</p>											

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827

康道新能源

地址: www.dgsource.com
电话: 0769-85337533
手机: 2550176938@qq.com 传真: 0769-85332827