

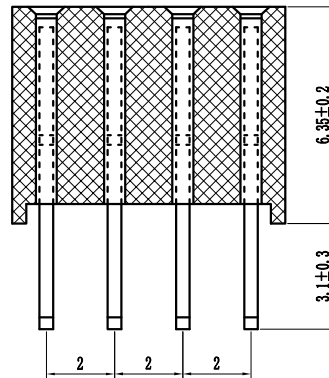
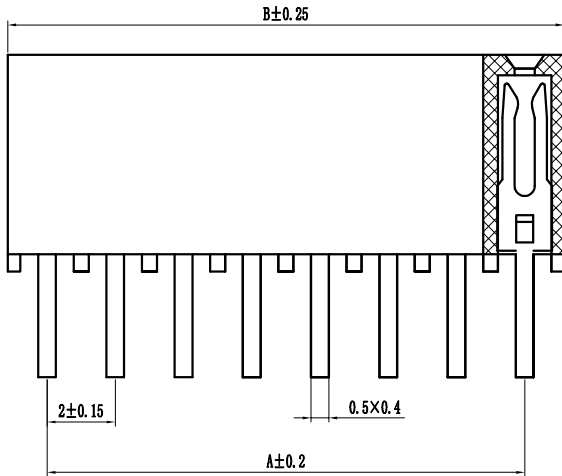


环保物料

Pin数	尺寸A	尺寸B
4X2	2.0	4.5
4X3	4.0	6.5
4X4	6.0	8.5
4X5	8.0	10.5
4X6	10.0	12.5
4X7	12.0	14.5
4X8	14.0	16.5
4X9	16.0	18.5
4X10	18.0	20.5
4X11	20.0	22.5
4X12	22.0	24.5
4X13	24.0	26.5
4X14	26.0	28.5
4X15	28.0	30.5
4X16	30.0	32.5
4X17	32.0	34.5
4X18	34.0	36.5
4X19	36.0	38.5
4X20	38.0	40.5
4X21	40.0	42.5
4X22	42.0	44.5
4X23	44.0	46.5
4X24	46.0	48.5
4X25	48.0	50.5
4X26	50.0	52.5
4X27	52.0	54.5
4X28	54.0	56.5
4X29	56.0	58.5
4X30	58.0	60.5
4X31	60.0	62.5
4X32	62.0	64.5
4X33	64.0	66.5
4X34	66.0	68.5
4X35	68.0	70.5
4X36	70.0	72.5
4X37	72.0	74.5
4X38	74.0	76.5
4X39	76.0	78.5
4X40	78.0	80.5

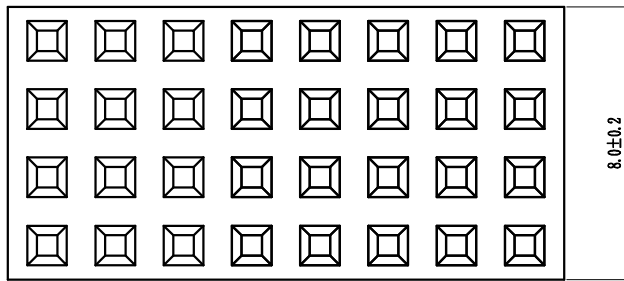

PCB LAYOUT

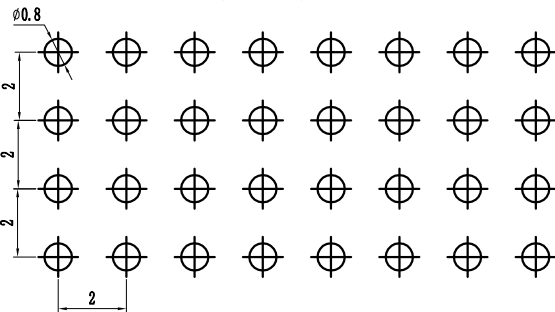

Specification:

Current Rating : 2AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

F 20 0D-XXX X X -XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No:	② Pitch:	③ Tail/Mounting Style:	④ No. of Pins:	⑤ Insulator Color:
P=Pin Header	08-0.80	9D-Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red
F=Female Header	10=1.00	9S-Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12=1.27	0D-Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray
E=Ejector Header	20=2.00	0S-Horizontal SMT Type	i i i i	K:White P:Light Blue
	25=2.54		140=1*40pin 240=2*40pin	
	39=3.96			
	50=5.08			

⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code
A-PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request	
B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS	
C-PA6T	0B-Sn-Au 2u" 0C-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)	
D-PA6T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"		
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" i		
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"		

REV.	新图面发行	2017.06.16	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE
				LINEAR	ANGLES	1:1		
				0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	KDFH-0098
DWG. NO:	ENDE1098
REV:	AO
SHEET:	1/1