


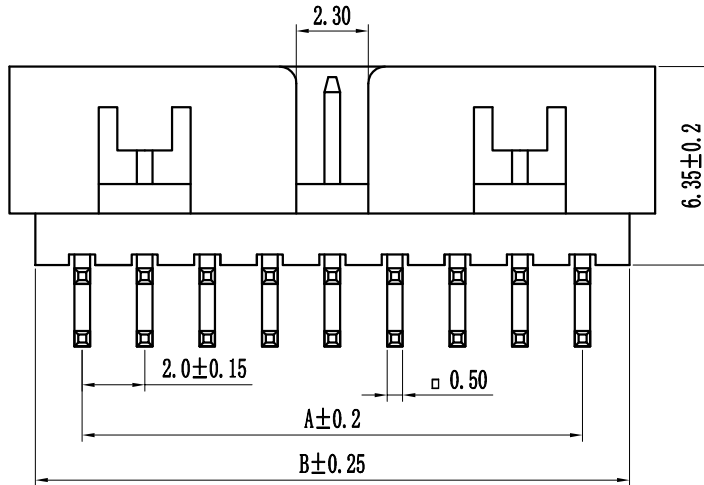


# 环保物料

Pin数	尺寸A	尺寸B	尺寸C
2×5	8.00	11.00	12.65
2×6	10.00	13.00	14.65
2×7	12.00	15.00	16.65
2×8	14.00	17.00	18.65
2×9	16.00	19.00	20.65
2×10	18.00	21.00	22.65
2×11	20.00	23.00	24.65
2×12	22.00	25.00	26.65
2×13	24.00	27.00	28.65
2×14	26.00	29.00	30.65
2×15	28.00	31.00	32.65
2×16	30.00	33.00	34.65
2×17	32.00	35.00	36.65
2×18	34.00	37.00	38.65
2×19	36.00	39.00	40.65
2×20	38.00	41.00	42.65
2×21	40.00	43.00	44.65
2×22	42.00	45.00	46.65
2×23	44.00	47.00	48.65
2×24	46.00	49.00	50.65
2×25	48.00	51.00	52.65
2×26	50.00	53.00	54.65
2×27	52.00	55.00	56.65
2×28	54.00	57.00	58.65
2×29	56.00	59.00	60.65
2×30	58.00	61.00	62.65
2×31	60.00	63.00	64.65
2×32	62.00	65.00	66.65
2×33	64.00	67.00	68.65
2×34	66.00	69.00	70.65
2×35	68.00	71.00	72.65
2×36	70.00	73.00	74.65
2×37	72.00	75.00	76.65
2×38	74.00	77.00	78.65
2×39	76.00	79.00	80.65
2×40	78.00	81.00	82.65

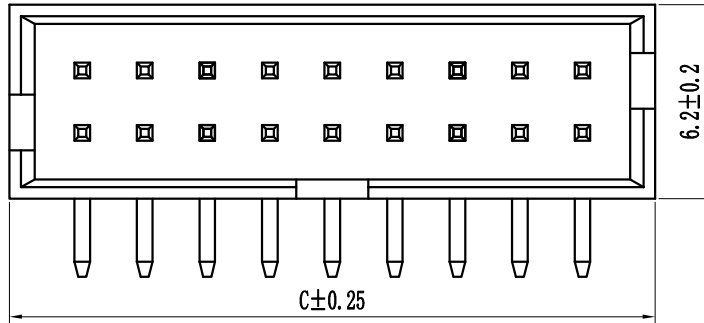

Specification:  
 Current Rating : 1.5AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PBT/PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

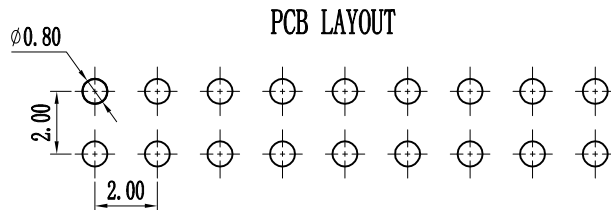

B 20 9D-XXX X X-XX-X-XXX				
①	②	③	④	⑤
① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail/Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA6T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0C-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	

		GENERAL TOLERANCES		SCALE:	NAME	DATE
		LINEAR	ANGLES	1:1		
		0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
AO	新图面发行	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

**康导新能源**

网址: www.dgoonne.com 电话: 0768-85337633

邮箱: 285017698@qq.com 传真: 0768-85392827

PART. NO: KDBH-0024

DWG. NO: ENDE2024

REV: AO SHEET: 1/1

TITLE: Pitch2.00mm Box Header, Dual Row, Plastic Height 6.35mm, Right Angle Type