
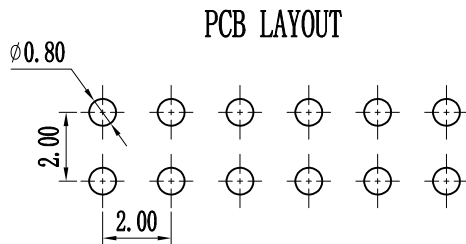
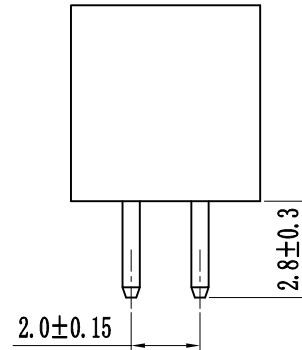
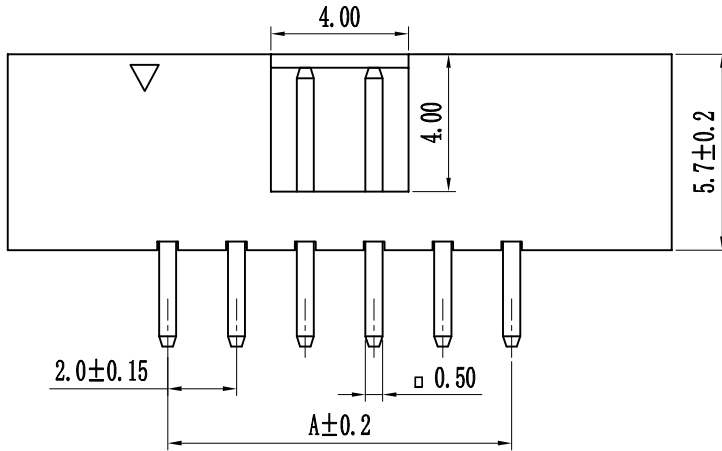


环保物料

| Pin数 | 尺寸A | 尺寸B | 尺寸C |
|------|-------|-------|-------|
| 2×3 | 4.00 | 12.20 | 13.30 |
| 2×4 | 6.00 | 14.20 | 15.30 |
| 2×5 | 8.00 | 16.20 | 17.30 |
| 2×6 | 10.00 | 18.20 | 19.30 |
| 2×7 | 12.00 | 20.20 | 21.30 |
| 2×8 | 14.00 | 22.20 | 23.30 |
| 2×9 | 16.00 | 24.20 | 25.30 |
| 2×10 | 18.00 | 26.20 | 27.30 |
| 2×11 | 20.00 | 28.20 | 29.30 |
| 2×12 | 22.00 | 30.20 | 31.30 |
| 2×13 | 24.00 | 32.20 | 33.30 |
| 2×14 | 26.00 | 34.20 | 35.30 |
| 2×15 | 28.00 | 36.20 | 37.30 |
| 2×16 | 30.00 | 38.20 | 39.30 |
| 2×17 | 32.00 | 40.20 | 41.30 |
| 2×18 | 34.00 | 42.20 | 43.30 |
| 2×19 | 36.00 | 44.20 | 45.30 |
| 2×20 | 38.00 | 46.20 | 47.30 |
| 2×21 | 40.00 | 48.20 | 49.30 |
| 2×22 | 42.00 | 50.20 | 51.30 |
| 2×23 | 44.00 | 52.20 | 53.30 |
| 2×24 | 46.00 | 54.20 | 55.30 |
| 2×25 | 48.00 | 56.20 | 57.30 |
| 2×26 | 50.00 | 58.20 | 59.30 |
| 2×27 | 52.00 | 60.20 | 61.30 |
| 2×28 | 54.00 | 62.20 | 63.30 |
| 2×29 | 56.00 | 64.20 | 65.30 |
| 2×30 | 58.00 | 66.20 | 67.30 |
| 2×31 | 60.00 | 68.20 | 69.30 |
| 2×32 | 62.00 | 70.20 | 71.30 |
| 2×33 | 64.00 | 72.20 | 73.30 |
| 2×34 | 66.00 | 74.20 | 75.30 |

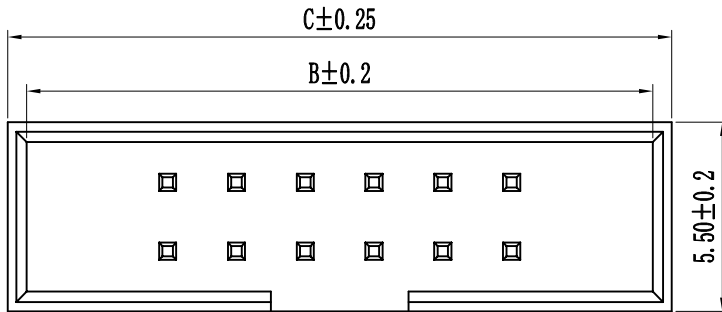

Specification:

Current Rating : 1.5AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

B 20 0D-XXX X X -XX -X -XXX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

| ① Series No: | ② Pitch: | ③ Tail/Mounting Style: | ④ No. of Pins: | ⑤ Insulator Color: |
|------------------|----------|-------------------------|-------------------------|---------------------------|
| P=Pin Header | 08-0.80 | 9D-Right Angle DIP Type | Single Row Double Row | A:Black B:Brown C:Red |
| F=Female Header | 10-1.00 | 9S-Straight SMT Type | 101=1*1Pin 201=2*1Pin | D:Orange E:Yellow F:Green |
| B=Box Header | 12-1.27 | 0D-Straight DIP Type | 102=1*2Pin 202=2*2Pin | G:Blue H:Violet J:Gray |
| E=Ejector Header | 20-2.00 | 0S-Horizontal SMT Type | i i i i | K:White P:Light Blue |
| | 25-2.54 | | 140=1*40pin 240=2*40pin | |
| | 39-3.96 | | | |
| | 50-5.08 | | | |

| ⑥ Material Type: | ⑦ Plating Type: | ⑧ RoHS Request: | ⑨ Customer Code |
|------------------|---|---------------------|-----------------|
| A-PBT | 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au | 0:No Request | |
| B-PA46 | 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" | 1:RoHS | |
| C-PA6T | 0B-Sn-Au 2u" 0C-Sn-Au 15u" 5B-Au 2u" | 2:HF (Halogen Free) | |
| D-PA9T | 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" | | |
| E-LCP | 0D-Sn-Au 4u" 0I-Sn-Au 40u" i | | |
| | 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u" | | |

| REV. | 新图面发行 | 2017.06.16 | UNIT: MM | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |
|------|-----------------|------------|----------|--------------------|-----------|------------|------|------------|
| | | | | LINEAR | ANGLES | | | |
| | | | | 0.00±0.15 | X° REF±6° | APPROVED | 黎腾 | 2017.06.16 |
| | | | | 0.00±0.15 | X° ±3° | DESIGNER | 肖坤权 | 2017.06.16 |
| | | | | 0.000±0.08 | X° X'±2° | DRAWN | 旷淇 | 2017.06.16 |
| | REVISION RECORD | DATE | SIZE: A4 | | | | | |

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175698@qq.com 传真: 0769-85392827

TITLE: Pitch2.00mm Box Header, Dual Row, Plastic Height 5.7mm, DIP

| | |
|-----------|-----------|
| PART. NO: | KDBH-0017 |
| DWG. NO: | ENDE2017 |
| REV: | AO |
| SHEET: | 1/1 |