
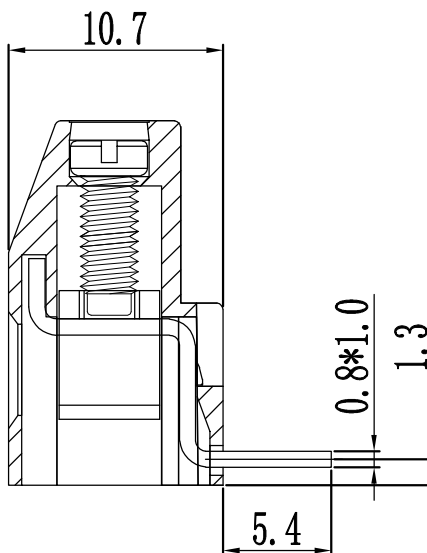
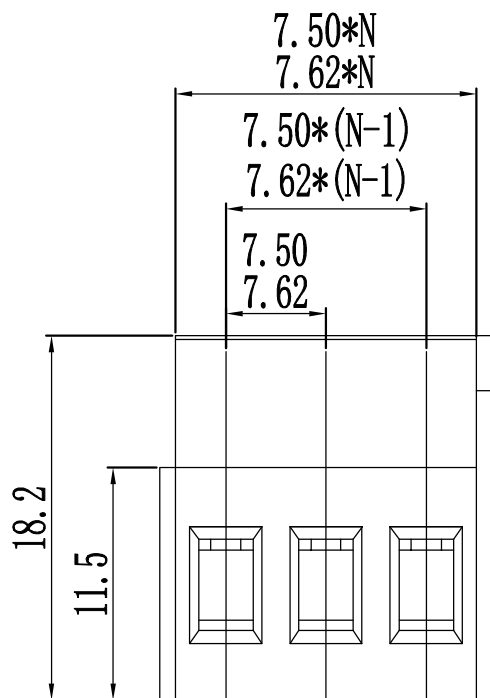


# 环保物料

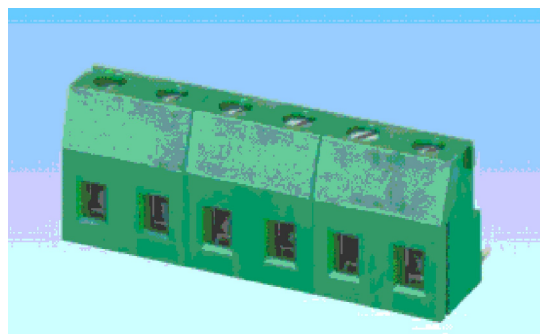

产品型号	MODEL	KD129R	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	M3.0, 钢, 镀锌	steel, Zinc Plated
弹片	Reed	黄铜, 镀镍	Brass, Ni plated
焊针	Pin header	黄铜, 镀锡	Brass, Tin plated
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	450V
额定电流	Rated current	20A	20A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2500V/1min	
使用线径	Wire range	24-12AWG 4.0mm <sup>2</sup>	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	0.5N.m	4.4Lb. in
剥线长度	Strip length	6-7mm	

N=Number of Contacts

		GENERAL TOLERANCES		SCALE:	NAME	DATE	<b>康导新能源</b> 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392627	PART. NO:	
		LINEAR      ANGLES 0.0±0.35    X° REF±6°		1:1	黎腾	2017.06.16		KDTB0053	
AO	新图面发行	2017.06.16	UNIT: MM	DESIGNER	肖坤权	2017.06.16	DWG. NO:		
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	旷淇	2017.06.16	REV: AO		
		0.00±0.25    X° ±3°		TITLE:				SHEET: 1/1	
		0.000±0.15    X° X'±2°		Pitch 7.50/7.62mm Euro Terminal Blocks					