
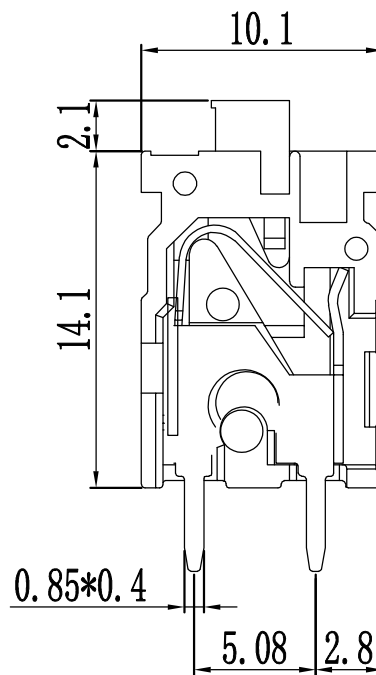
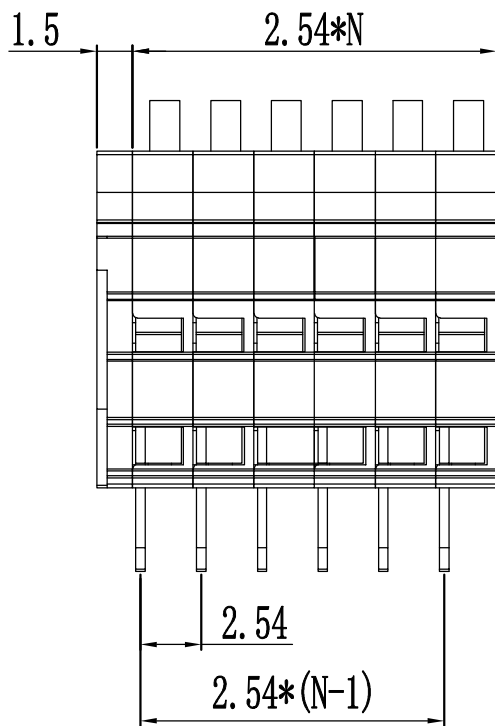


# 环保物料

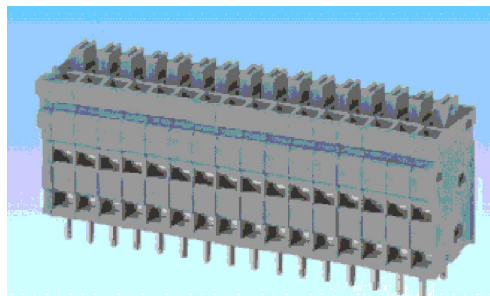

产品型号	MODEL	KD143V	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	-	
弹片	Reed	不锈钢 Stainless steel	
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	150V	130V
额定电流	Rated current	5A	6A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC1250V/1min	
使用线径	Wire range	24-20AWG 1.0mm <sup>2</sup>	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	-	
剥线长度	Strip length	11mm	

N=Number of Contacts

		GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392627	PART. NO:	KDTB0161		
				1:1				REV. NO:			
				APPROVED	黎腾	2017.06.16	TITLE: Pitch2.54mm Screwless Terminal Blocks	REV:	A0	SHEET:	1/1
				DESIGNER	肖坤权	2017.06.16					
				DRAWN	旷淇	2017.06.16					
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°						
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°						