
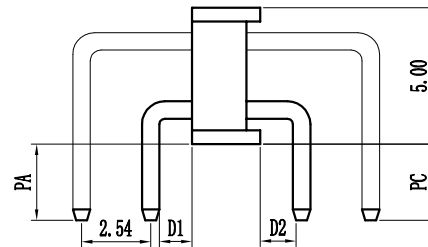
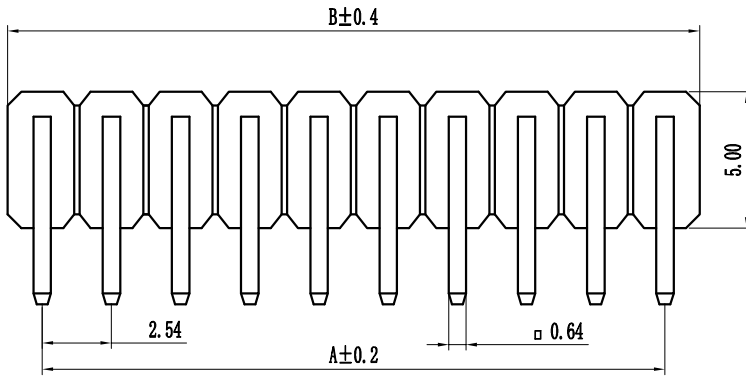



环保物料

Pin数	尺寸A	尺寸B
2x1	-	2.54
2x2	2.54	5.08
2x3	5.08	7.62
2x4	7.62	10.16
2x5	10.16	12.70
2x6	12.70	15.24
2x7	15.24	17.78
2x8	17.78	20.32
2x9	20.32	22.86
2x10	22.86	25.40
2x11	25.40	27.94
2x12	27.94	30.48
2x13	30.48	33.02
2x14	33.02	35.56
2x15	35.56	38.10
2x16	38.10	40.64
2x17	40.64	43.18
2x18	43.18	45.72
2x19	45.72	48.26
2x20	48.26	50.80
2x21	50.80	53.34
2x22	53.34	55.88
2x23	55.88	58.42
2x24	58.42	60.96
2x25	60.96	63.50
2x26	63.50	66.04
2x27	66.04	68.58
2x28	68.58	71.12
2x29	71.12	73.66
2x30	73.66	76.20
2x31	76.20	78.74
2x32	78.74	81.28
2x33	81.28	83.82
2x34	83.82	86.36
2x35	86.36	88.90
2x36	88.90	91.44
2x37	91.44	93.98
2x38	93.98	96.52
2x39	96.52	99.06
2x40	99.06	101.60

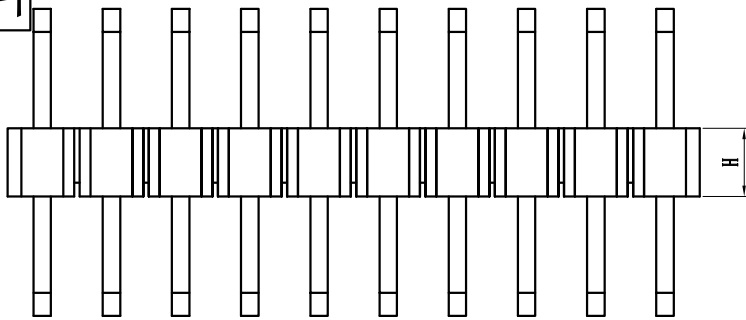

Specification:
 Current Rating : 3.0AMP
 Temperature Range : -40°C to +105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard: PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Height
H=1.0mm, 1.5mm, 1.7mm, 2.0mm, 2.5mm, 3.3mm

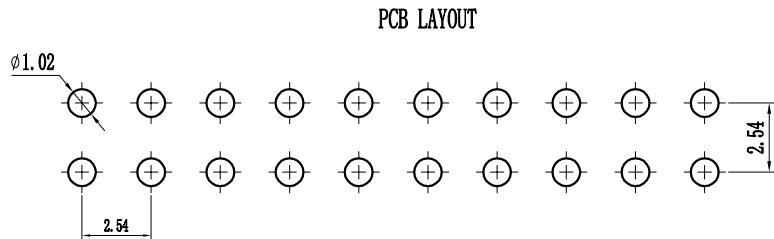

P 25 9D-XXX X X-XX-X-XXX									
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:		⑤ Insulator Color:				
P=Pin Header	08-0.80	9D-Right Angle DIP Type	Single Row	Double Row	A:Black	B:Brown	C:Red		
F=Female Header	10-1.00	9S-Straight SMT Type	101=1*1Pin	201=2*1Pin	D:Orange	E:Yellow	F:Green		
B=Box Header	12-1.27	0D-Straight DIP Type	102=1*2Pin	202=2*2Pin	G:Blue	H:Violet	J:Gray		
E=Injector Header	20-2.00	0S-Horizontal SMT Type	:	:	K:White	P:Light Blue			
	25-2.54		140=1*40pin	240=2*40pin					
	30-3.96								
	50-5.08								
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:			⑨ Customer Code				
A-PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request							
B-PA46	0A-Sn-Au 1u" 0F-Sr-Au 10u" 5A-Au 1u"	1:RoHS							
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 6B-Au 2u"	2:HF (Halogen Free)							
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"								
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" !								
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"								

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO:									
LINER	ANGLES	1:1	黎腾	2017.06.16		KDPH-0106									
0.00±0.25	X° REF±6°	APPROVED													
0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16		DWG. NO:									
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	TITLE:	Pitch2.54mm Pin Header, Single Plastic, Dual Row, Right Angle Type	REV:	AO	SHEET:	1/1