




环保物料

Specifications:

Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 1000M\Omega$   
 Rated voltage: 250V AC DC  
 Rated current: 5.0A AC DC  
 Withstand Voltage: 1000V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: LCP UL94V-0, BLACK  
 Contacts: Brass/MATTE Sn-plated  
 Solder Tabs: Brass/MATTE Sn-plated

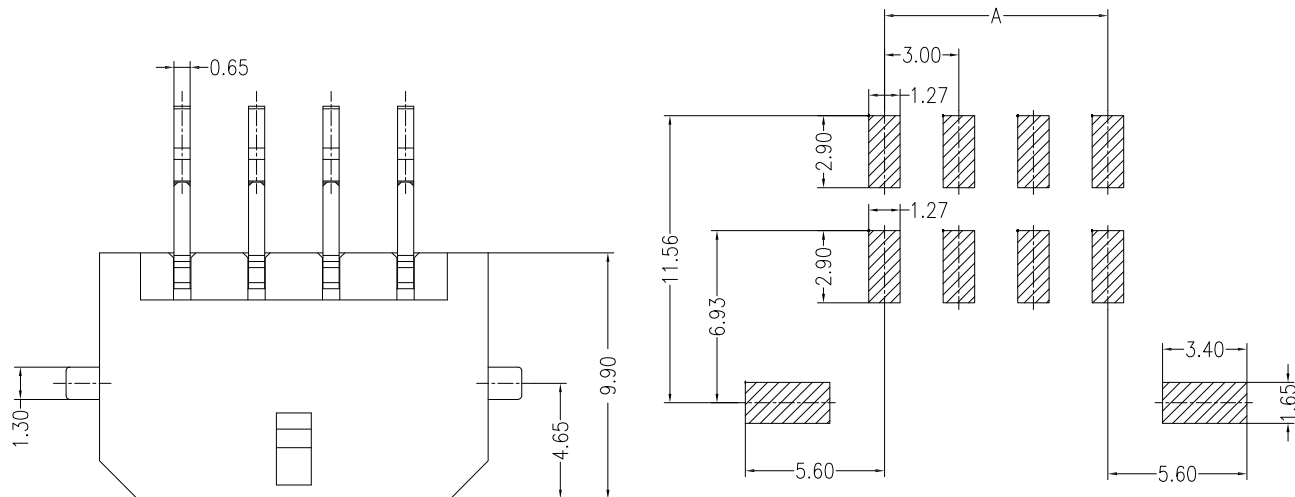

PCB LAYOUT(Tolerance:  $\pm 0.05$ )

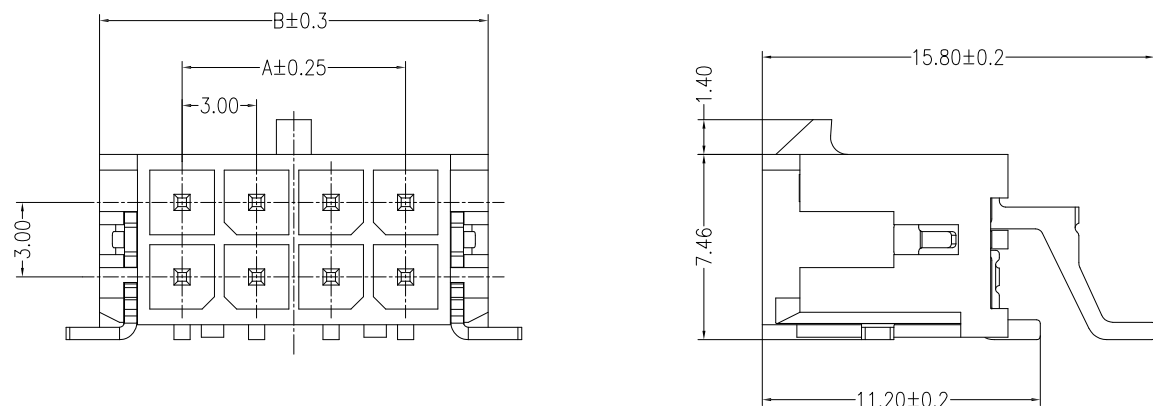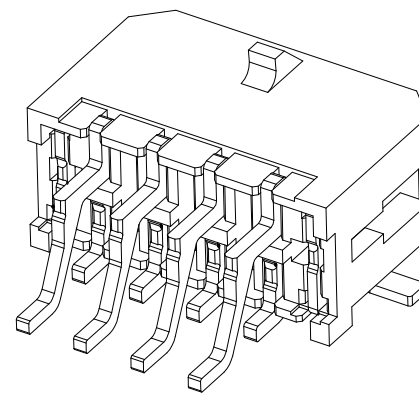

PIN	DIM A	DIM B
2x1		6.65
2x2	3.00	9.65
2x3	6.00	12.65
2x4	9.00	15.65
2x5	12.00	18.65
2x6	15.00	21.65
2x7	18.00	24.65
2x8	21.00	27.65
2x9	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	PART. NO: 23002AWR	
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:	
A0	新图面发行	2017.06.16	UNIT: MM	0.00 $\pm$ 0.25	X° REF $\pm$ 6°	DESIGNER	肖坤权	2017.06.16	TITLE: 3.00mm PITCH 90° WAFER SMT TYPE		REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.15	X° X' $\pm$ 2°	DRAWN	旷淇	2017.06.16			SHEET: 1/1