
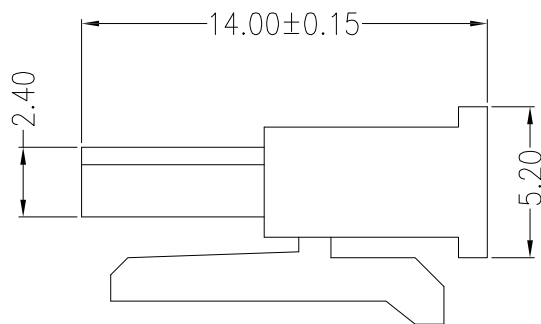
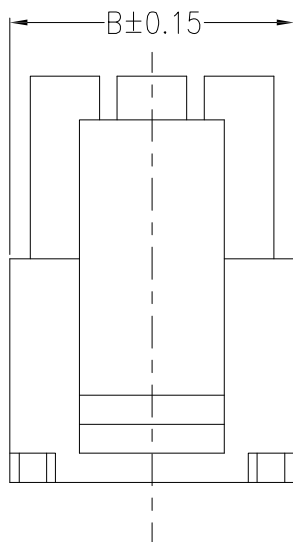


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 24  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 5.0A AC DC  
 耐 电 压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range) :  $-25^{\circ}C \sim +85^{\circ}C$

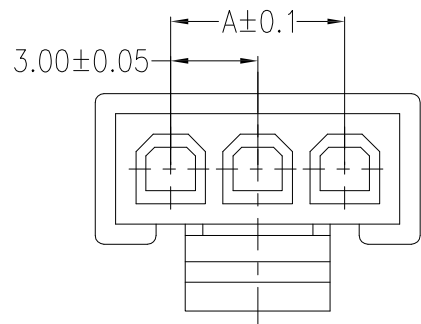

Circuits	Dimensions (mm)	
	A	B
02	3.0	6.8
03	6.0	9.8
05	12.0	15.8
06	15.0	18.8
07	18.0	21.8
08	21.0	24.8
09	24.0	27.8
10	27.0	30.8
11	30.0	33.8
12	33.0	36.8

A	HOUSING	1 PCS	PA66	COLOR:BLACK
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO: 23001Y
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:
A0	新图面发行	2017.06.16	0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16	REV: A0		SHEET: 1/1
REV.	REVISION RECORD	DATE	0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16	TITLE: 3.00mmPITCH HOUSING		
			SIZE: A4	0.000±0.15	X° X'±2°					