

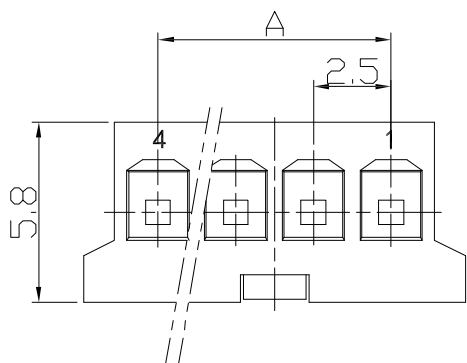
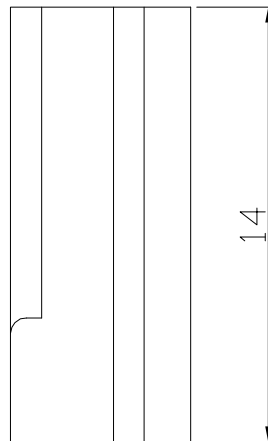


环保物料

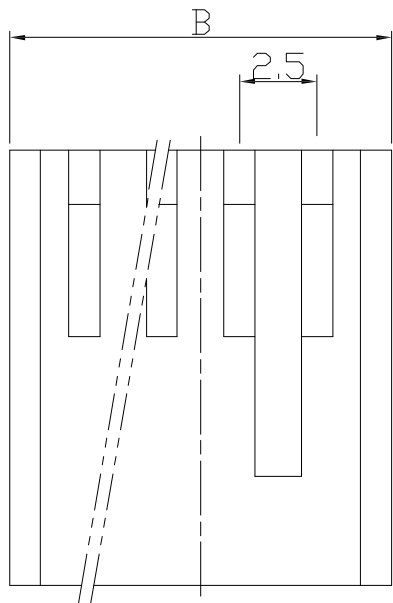

主要技术参数 Main Specifications

线 数 (Poles): 02~20
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐 电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

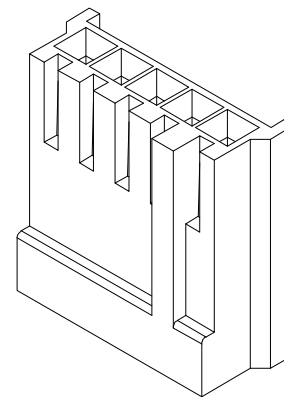

PIN	Dimensions	
	A	B
2P	2.50	6.90
3P	5.00	9.40
4P	7.50	11.90
5P	10.00	14.40
6P	12.50	16.90
7P	15.00	19.40
8P	17.50	21.90
9P	20.00	24.40
10P	22.50	26.90
11P	25.00	29.40
12P	27.50	31.90
13P	30.00	34.40
14P	32.50	36.90
15P	35.00	39.40
16P	37.50	41.90
17P	40.00	44.40
18P	42.50	46.90
19P	45.00	49.40
20P	47.50	51.90

A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	
LINER	ANGLES	APPROVED	黎腾	2017.06.16	
0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16	
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°



PART. NO:	22510Y	
DWG. NO:		
REV:	A0	SHEET: 1/1