
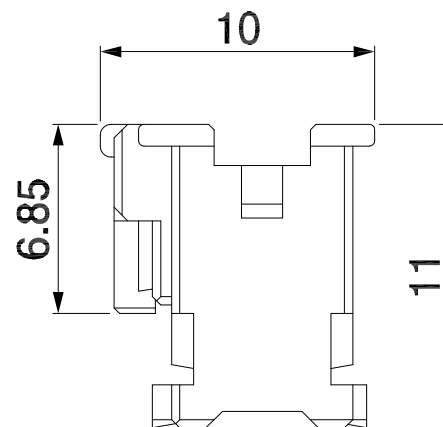


环保物料

Specifications:
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 125V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
 Housing: NYLON66 UL94V-0 NATURAL

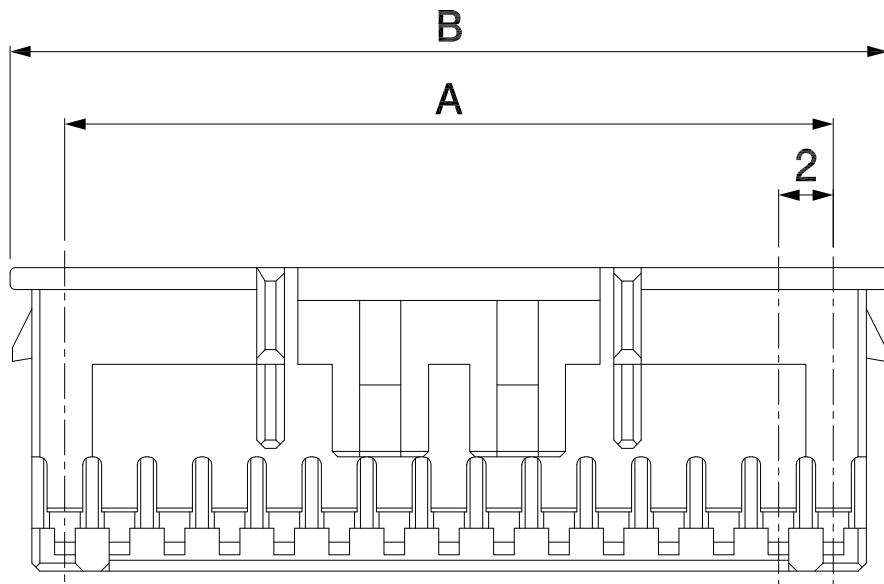

PIN	Dimensions	
	A	B
10P	8.00	12.00
12P	10.00	14.00
14P	12.00	16.00
16P	14.00	18.00
20P	18.00	22.00
22P	20.00	24.00
24P	22.00	26.00
40P	38.00	42.00

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO: 22010Y	
				LINEAR	ANGLES					APPROVED	黎腾
A0	新图面发行	2017.06.16	0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16	REV: A0		SHEET: 1/1	
REV.	REVISION RECORD	DATE	0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16				TITLE: 2.00mmPITCH HOUSING
			SIZE: A4	0.000±0.15	X° X'±2°						