
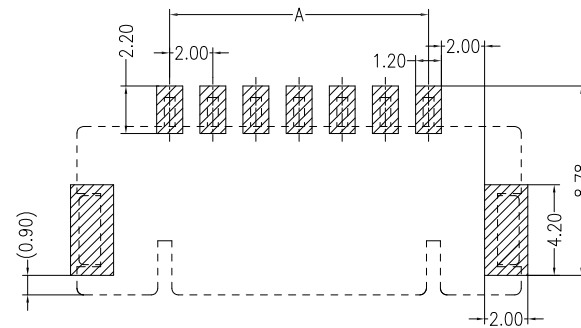
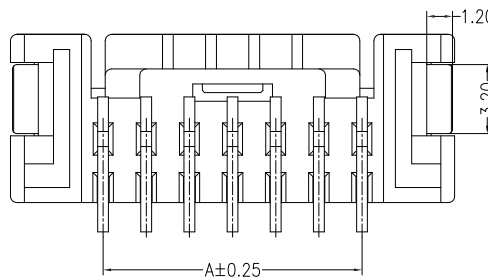
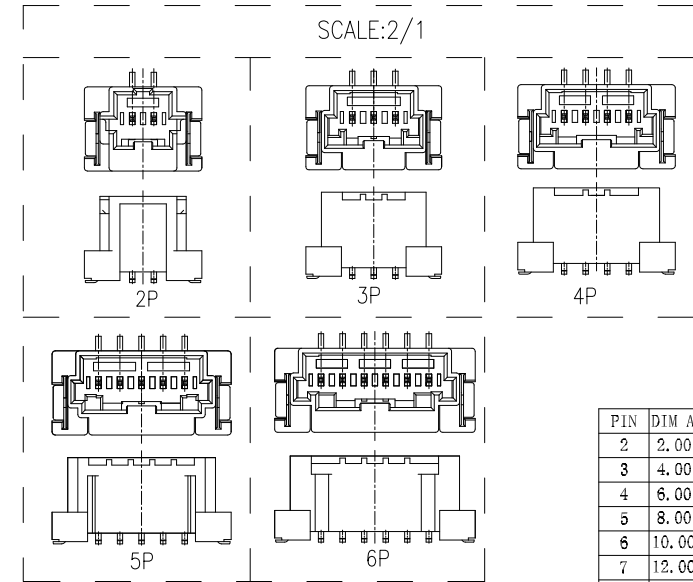

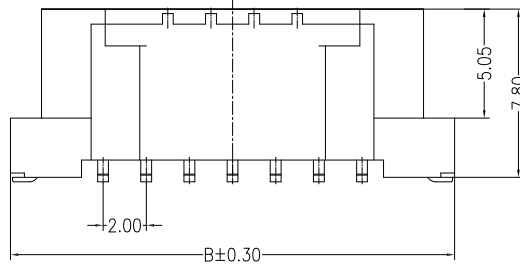
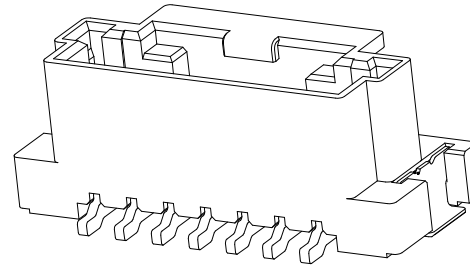


环保物料

Specifications:

Contact resistance: $\leq 10m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 125V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
 Housing: PA9T UL94V-0, Natural
 Contacts: Phosphor Bronze/MATTE Sn-plated
 Solder Tabs: Brass/MATTE Sn-plated

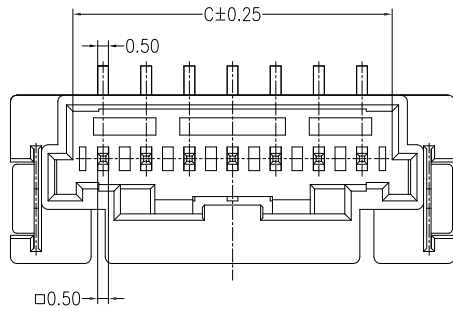

PCB LAYOUT(Tolerance:±0.05)

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO:	
LINEAR	ANGLES	1:1	黎腾	2017.06.16		22009AWW	
0.0±0.35	X° REF±6°	APPROVED	肖坤权	2017.06.16	DWG. NO:		
0.00±0.25	X° ±3°	DESIGNER	旷淇	2017.06.16	REV: A0 SHEET: 1/1		
0.000±0.15	X° X'±2°	DRAWN			TITLE: 2.00mmPITCH 180° WAFER SMT TYPE		