
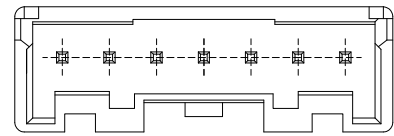
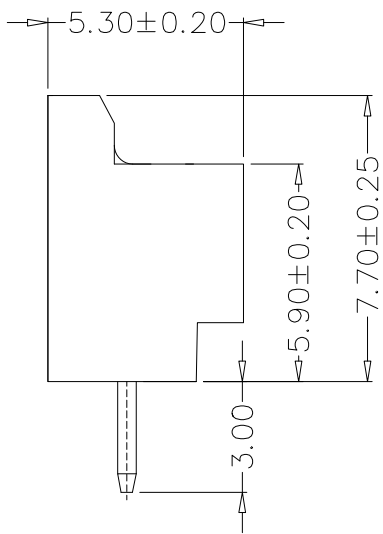




环保物料

SPECIFICATIONS


- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25°C ~ +85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PA66, UL94V-0
PIN Brass Tin-plated

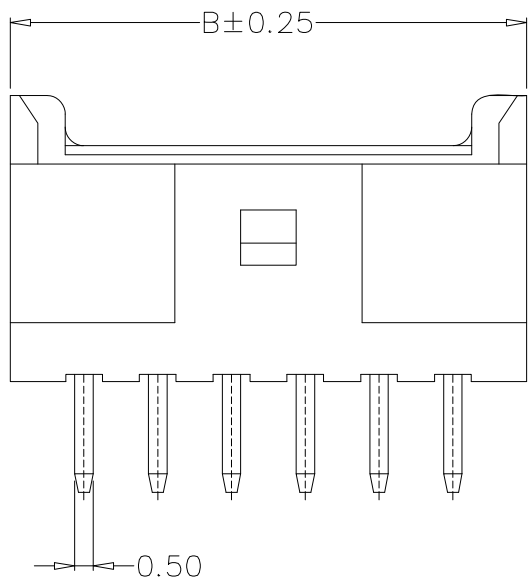

7~9A

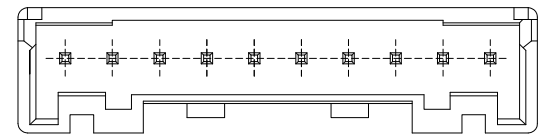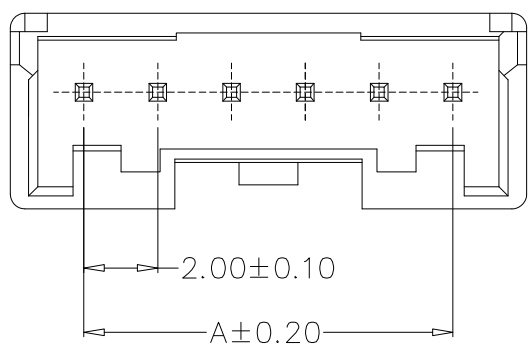

10~16A

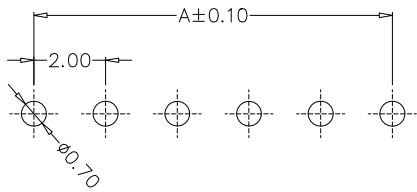

PCB LAYOUT

PIN	尺寸 (mm)	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
16	30.00	36.00

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<p>康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827</p>	PART. NO: 22008A	
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:	
				0.00 ± 0.35	X° REF ± 6°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
A0	新图面发行	2017.06.16	UNIT: MM	0.00 ± 0.25	X° ± 3°	DRAWN	旷淇	2017.06.16		TITLE: 2.00mmPITCH 180° WAFER DIP TYPE	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.15	X° X' ± 2°						