




环保物料






注：十孔及以上双卡扣

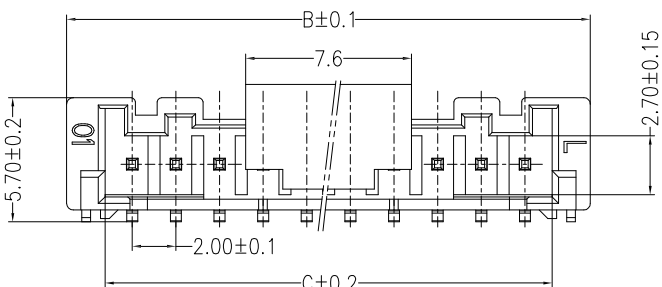



注：六孔及以下无此槽

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 15
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$



PIN.	DIM A	DIM B	DIM C
2pin	2.00	8.00	4.55
3pin	4.00	10.00	6.55
4pin	6.00	12.00	8.55
5pin	8.00	14.00	10.55
6pin	10.00	16.00	12.55
7pin	12.00	18.00	14.55
8pin	14.00	20.00	16.55
9pin	16.00	22.00	18.55
10pin	18.00	24.00	20.55
11pin	20.00	26.00	22.55
12pin	22.00	28.00	24.55
13pin	24.00	30.00	26.55
14pin	26.00	32.00	28.55
15pin	28.00	34.00	30.55

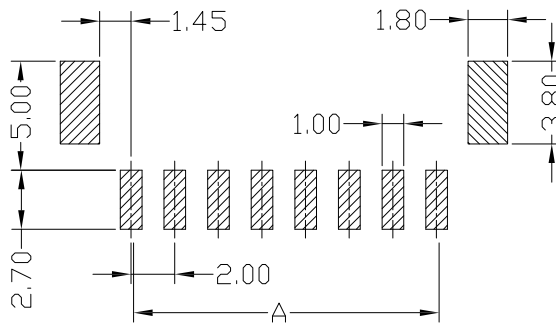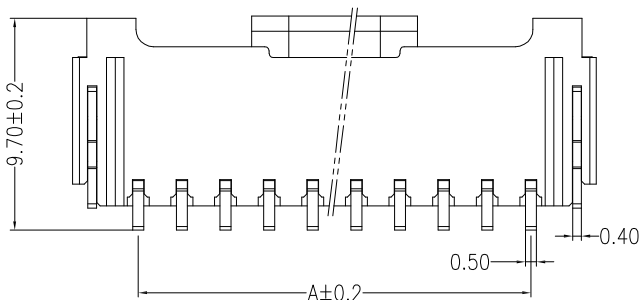

PCB LAYOUT

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
D	CAP	1 PCS	PA6T	UL 94V-0, COLOR:BEIGE
C	SOLDER TAB	2 PCS	Barss	Sn-plated
B	CONTACT	2~15 PCS	Barss	Sn-plated
A	HOUSING	1 PCS	PA6T	UL 94V-0, COLOR:BEIGE

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgonns.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 22008AWR
LINEAR	ANGLES	1:1	黎腾	2017.06.16		
0.0±0.35	X° REF±6°	APPROVED	肖坤权 <td>2017.06.16</td>	2017.06.16		
0.00±0.25	X° ±3°	DESIGNER	旷淇 <td>2017.06.16</td>	2017.06.16		
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	TITLE: 2.00mmPITCH 90° WAFER SMT TYPE	REV: A0 SHEET: 1/1