

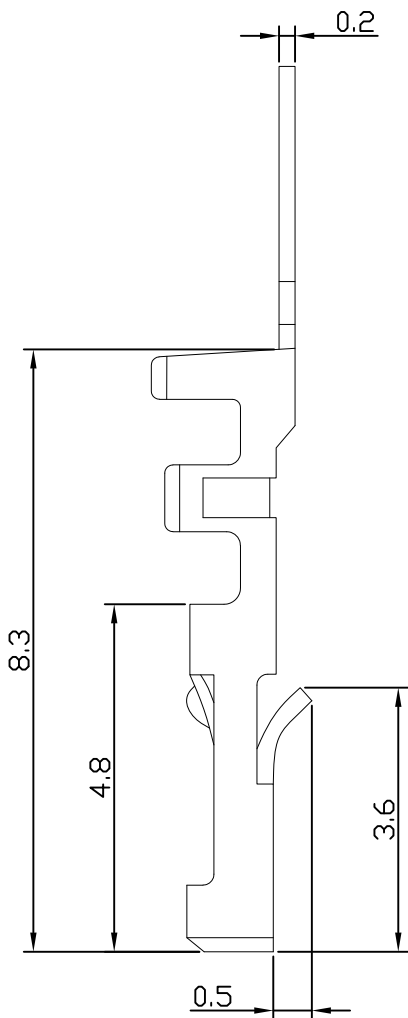



环保物料

主要技术参数 Main Specifications


接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$
 适用线规 (Applicable wire): AWG #28 to #24

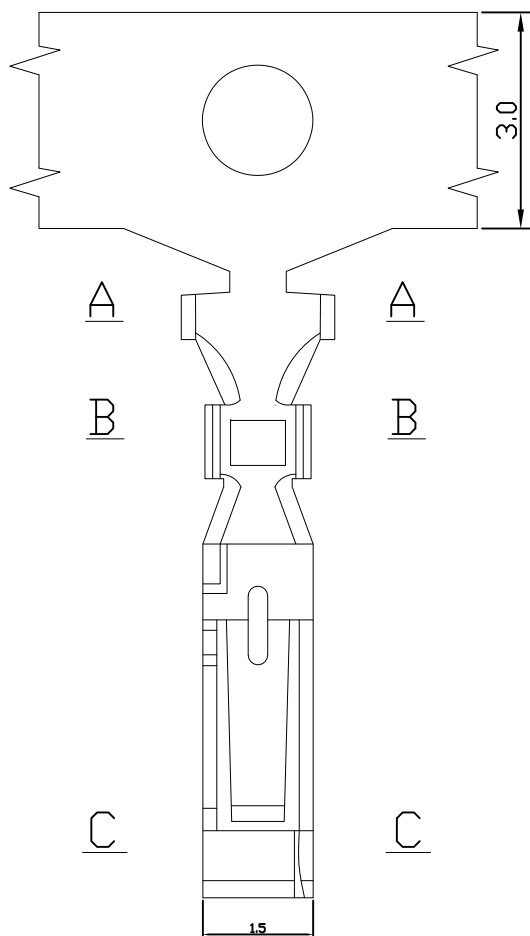

SECTION: A-A




SECTION: B-B



SECTION: C-C

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #24~#28	1.60mm (max)	Phosphor bronze	Tin-plated	

GENERAL TOLERANCES		SCALE:	NAME	DATE	 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO:									
LINEAR	ANGLES	1:1	黎腾	2017.06.16		22007T									
0.0±0.35	X° REF±6°	APPROVED													
0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16		DWG. NO:									
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16	TITLE:	2.00mmPITCH TERMINAL	REV:	A0	SHEET:	1/1