

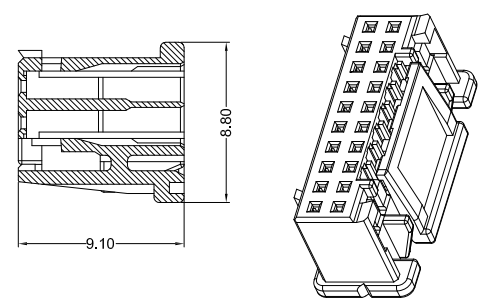





环保物料

Specifications:


Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 250V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 800V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA 66 BLACK, UL94V-0

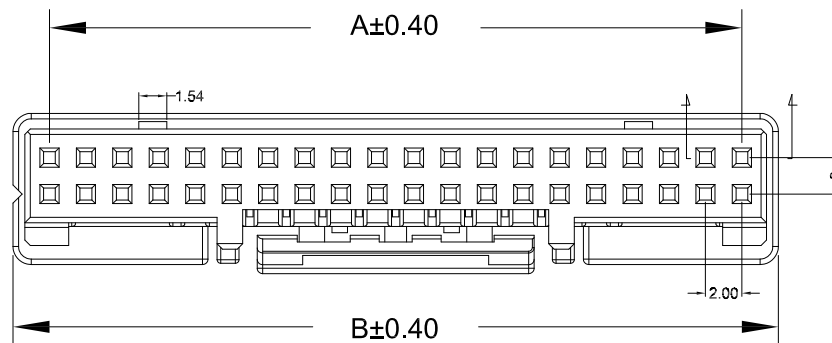


2*06P-2*07P

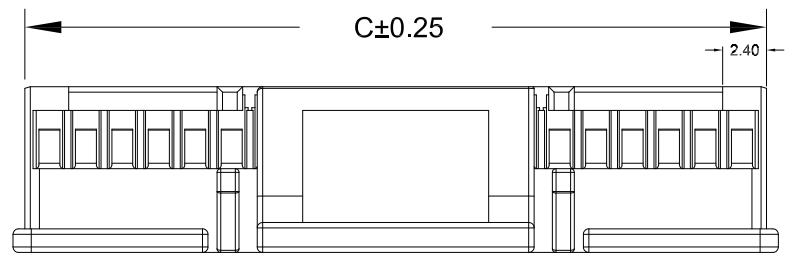


2*12P-2*14P





2*10P-2*11P



2*08P-2*09P



2*04P-2*05P

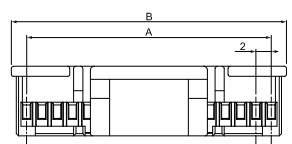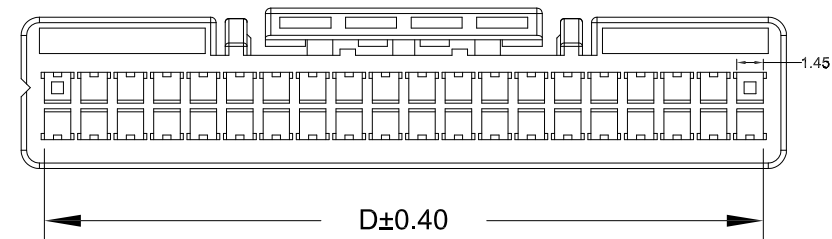

2*15P-2*20P

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2*04	6.00	10.00	8.65	7.55	2*13	24.00	28.00	26.65	25.55
2*05	8.00	12.00	10.65	9.55	2*14	26.00	30.00	28.65	27.55
2*06	10.00	14.00	12.65	11.55	2*15	28.00	32.00	30.65	29.55
2*07	12.00	16.00	14.65	13.55	2*16	30.00	34.00	32.65	31.55
2*08	14.00	18.00	16.65	15.55	2*17	32.00	36.00	34.65	33.55
2*09	16.00	20.00	18.65	17.55	2*18	34.00	38.00	36.65	35.55
2*10	18.00	22.00	20.65	19.55	2*19	36.00	40.00	38.65	37.55
2*11	20.00	24.00	22.65	21.55	2*20	38.00	42.00	40.65	39.55
2*12	22.00	26.00	24.65	23.55					

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<p>康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827</p>	PART. NO:	22006H		
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:			
				0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV:	A0	SHEET:	1/1
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16		TITLE: 2.00mmPITCH HOUSING			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°								