

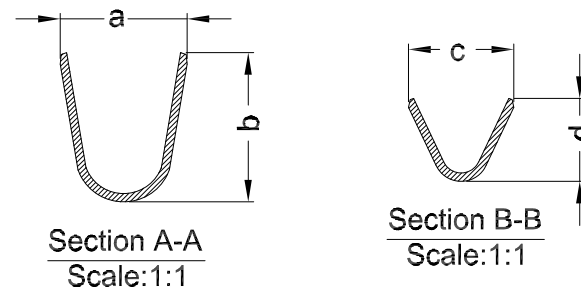
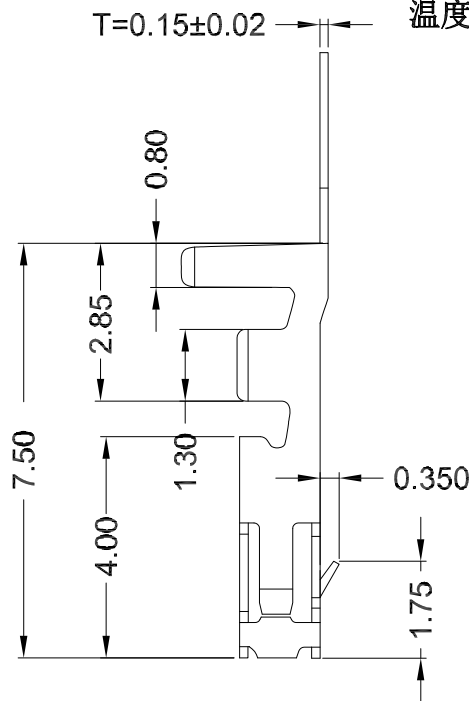


环保物料

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

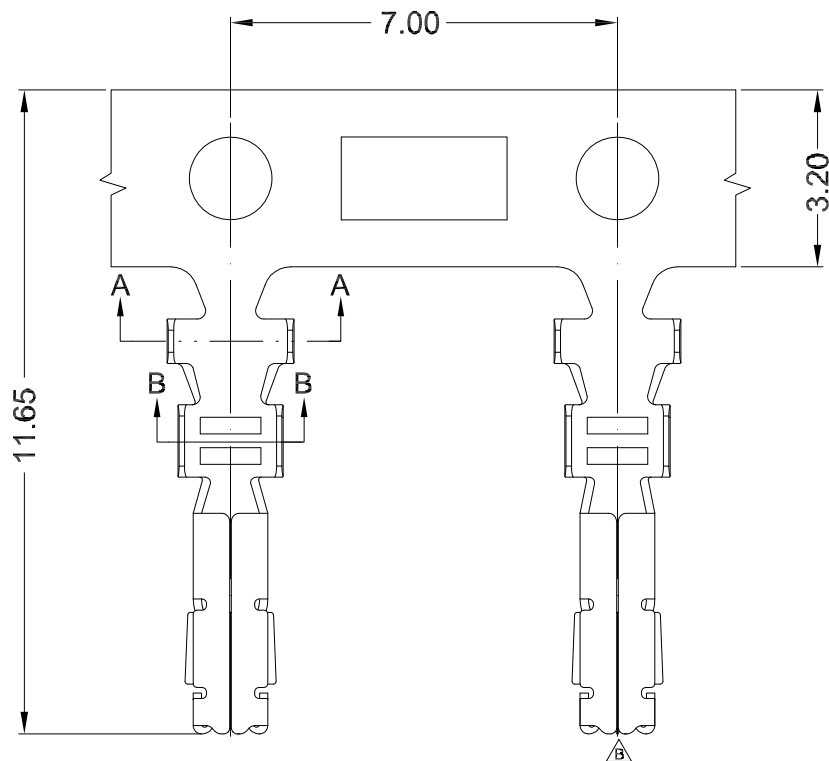

Part No.	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
STP-WF-200-006T1	#28~#32	1.90	1.90	1.15	1.30
STP-WF-200-006T2	#24~#28	2.20	2.40	1.65	1.30
STP-WF-200-006T3	#22~#26	2.30	2.70	1.90	1.50

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
-	-	Phosphor Bronze	Tin-plated	

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgonns.com 电话: 0769-8537633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 22006T
LINEAR	ANGLES	1:1	黎腾	2017.06.16		
0.0±0.35	X° REF±6°	APPROVED	肖坤权 <td>2017.06.16</td>	2017.06.16		
0.00±0.25	X° ±3°	DESIGNER	旷淇 <td>2017.06.16</td>	2017.06.16		
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	TITLE: 2.00mmPITCH TERMINAL	REV: A0 SHEET: 1/1