



环保物料

主要技术参数 Main Specifications



线 数 (Poles): 10 to 40  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 125V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-40^{\circ}C \sim +105^{\circ}C$

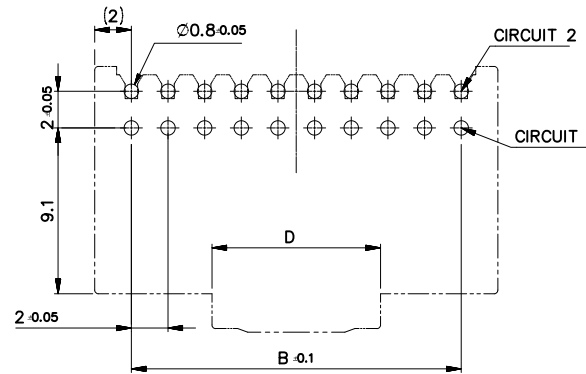

PCB LAYOUT

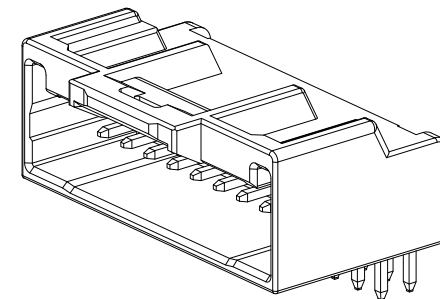

9.2	38	42	40
9.2	36	40	38
9.2	34	38	36
9.2	32	36	34
9.2	30	34	32
9.2	28	32	30
9.2	26	30	28
9.2	24	28	26
9.2	22	26	24
9.2	20	24	22
9.2	18	22	20
9.2	16	20	18
9.2	14	18	16
9.2	12	16	14
9.2	10	14	12
7.3	8	12	10
C	B	A	CIRCUIT

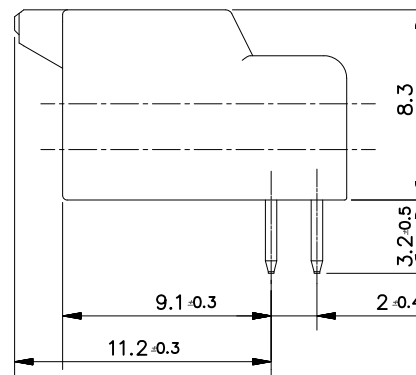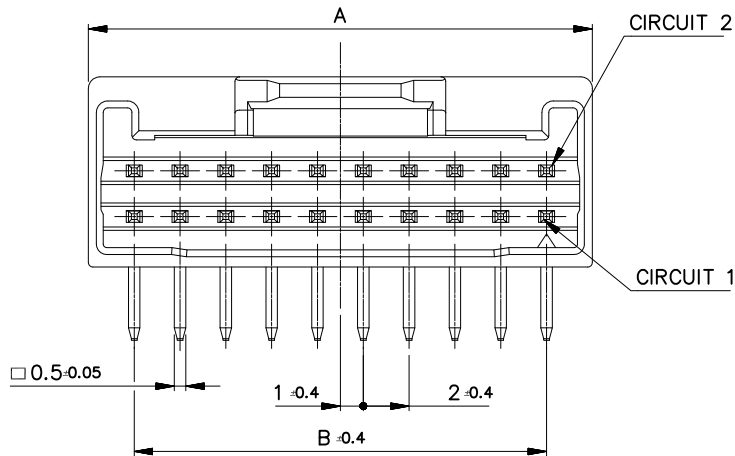

B	CONTACT	n PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA GLASS FILLED	UL 94V-0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176886@qq.com 传真: 0769-85392827	PART. NO:	22005AWR		
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:			
		0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV:	A0	SHEET:	1/1
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN		TITLE: 2.00mmPITCH 90° WAFER SMT TYPE			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°						