
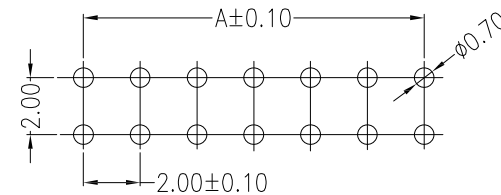
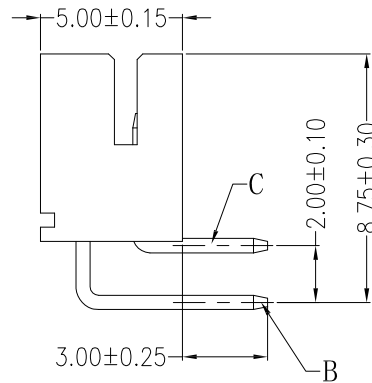
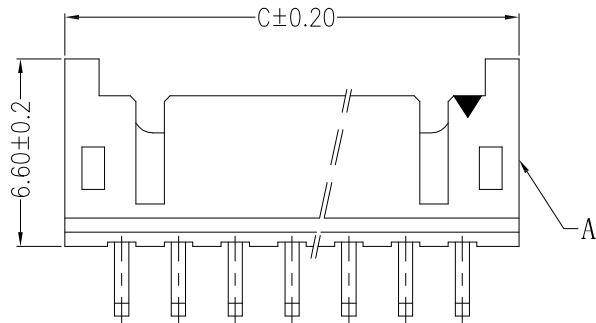
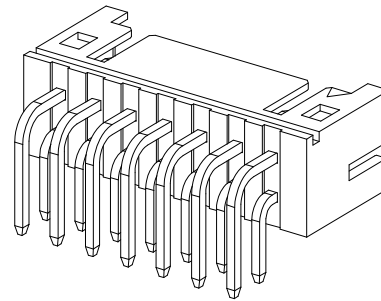


环保物料

主要技术参数 Main Specifications

线数 (Poles): 04 to 40
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

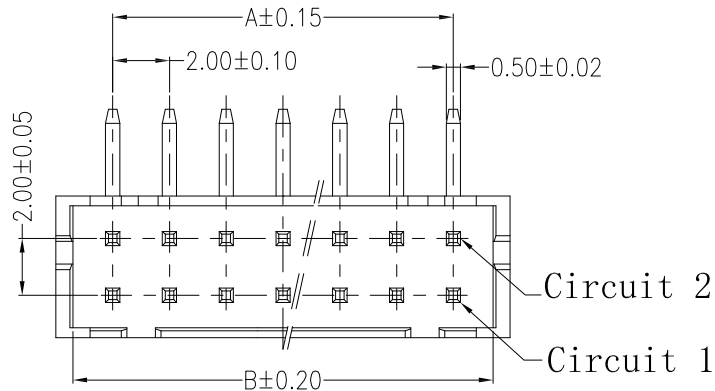

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	A	B	C
2*2	2.00	4.70	5.90
2*3	4.00	6.70	7.90
2*4	6.00	8.70	9.90
2*5	8.00	10.70	11.90
2*6	10.00	12.70	13.90
2*7	12.00	14.70	15.90
2*8	14.00	16.70	17.90
2*9	16.00	18.70	19.90
2*10	18.00	20.70	21.90
2*11	20.00	22.70	23.90
2*12	22.00	24.70	25.90
2*13	24.00	26.70	27.90
2*14	26.00	28.70	29.90
2*15	28.00	30.70	31.90
2*16	30.00	32.70	33.90
2*17	32.00	34.70	35.90
2*18	34.00	36.70	37.90
2*19	36.00	38.70	39.90
2*20	38.00	40.70	41.90

C	CONTACT	2~20 PCS	Brass	Sn-plated
B	CONTACT	2~20 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
					LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	A4	0.00±0.25	$X^{\circ} \pm 3^{\circ}$		黎腾	2017.06.16
					0.00±0.15	$X^{\circ} X' \pm 2^{\circ}$		肖坤权	2017.06.16
								旷淇	2017.06.16



PART. NO:	22003AW	
DWG. NO:		
REV:	A0	SHEET: 1/1