







环保物料

主要技术参数 Main Specifications


线数 (Poles): 02 to 12
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 150V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

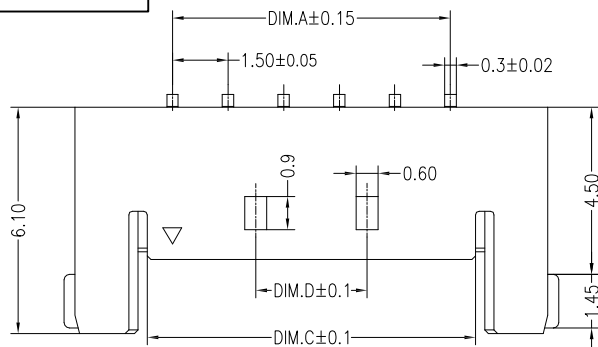

02P~04P Single Hole
Scale 1:0.7

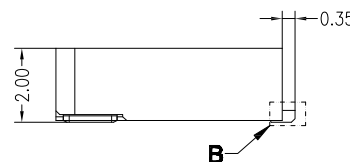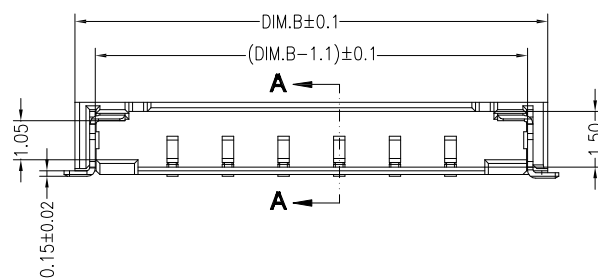


DETAIL B
SCALE 1:1



SECTION A-A
SCALE 1:1

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	3.00
08	10.50	15.75	11.85	3.00
09	12.00	17.25	13.35	6.00
10	13.50	18.75	14.85	8.55
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

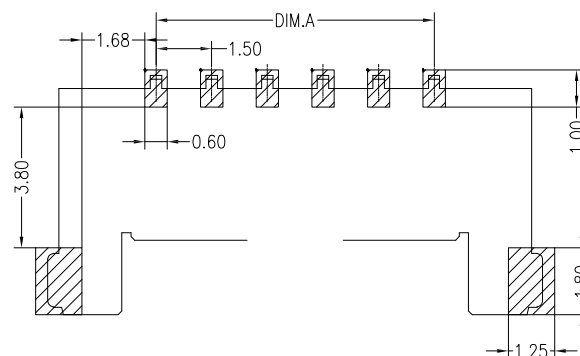

PCB LAYOUT

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	Brass	Sn-plated
B	CONTACT	2~12 PCS	PhosphorBronze	Gold-plated
A	PEDESTAL	1 PCS	PA4T	UL 94V-0, COLOR:BLACK



GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.35	X° REF±6°
0.00±0.25	X° ±3°
0.000±0.15	X° X'±2°

SCALE:	NAME	DATE
1:1	黎腾	2017.06.16
APPROVED	肖坤权	2017.06.16
DESIGNER	旷淇	2017.06.16



网址: www.dgonne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	21503AWR	
DWG. NO:		
REV:	A0	SHEET: 1/1

REV.	新图面发行	2017.06.16	UNIT: MM
	REVISION RECORD	DATE	SIZE: A4